



GUANGZHOU APRO BUILDING MATERIAL CO., LTD

广州市阿洛谱建材有限公司

Email: info@gzapro.com


Website: www.gzapro.com

ADD: No.66 Hua Gang Avenue

Huadu District Guangzhou, China 510815

A PART OF THE PROPERTY OF THE

Guangzhou Apro Building Materials Co Ltd (APRO) is a manufacturer professional in design, developing, manufacturing, installing aluminium products, also one-stop building materials services. Our products fields are prospetive and widely, including aluminum window, aluminum door, curtain wall,pergolas,shutters,railing and so on. APRO is an icon with the meaning of young, energetic, professional andinternational vision business value. Our mission is to provide our customer with expertise solution and quality service by build up a professional servicing network and experienced engineer teams. In addtion, our chief engineer have over 20 years experienced in this field. We offer a variety of technical tools to make aluminum system easy, including CAD and 3D files, sketch up and technical equipment. The products of APRO has the high quality both in design and details Therefore, the product of APRO is leading the market. APRO products are becoming a reliable and better value icon of your projects. We have an independent production workshops and 3 finished product warehouse, covering an area of 5000 square meters, which means that not only our production capacity is guaranteed, but also the delivery time is guaranteed, each product will be tested in our workshop to make sure it is 100 percent problem-free. Ensuring that the products Made-in-China is recognized. Also, we have a professional sales team and technical team, which provides us with the guarantee of a full range of after-sales service. We have quality inspection certificates for all products, and provide 10 years warranty according to the product category. After so many years of experience, we summarize our values as, treat our customer with a grateful heart, love and dedication, pay attention to practical results, improve management, improve quality, and strengthen services.

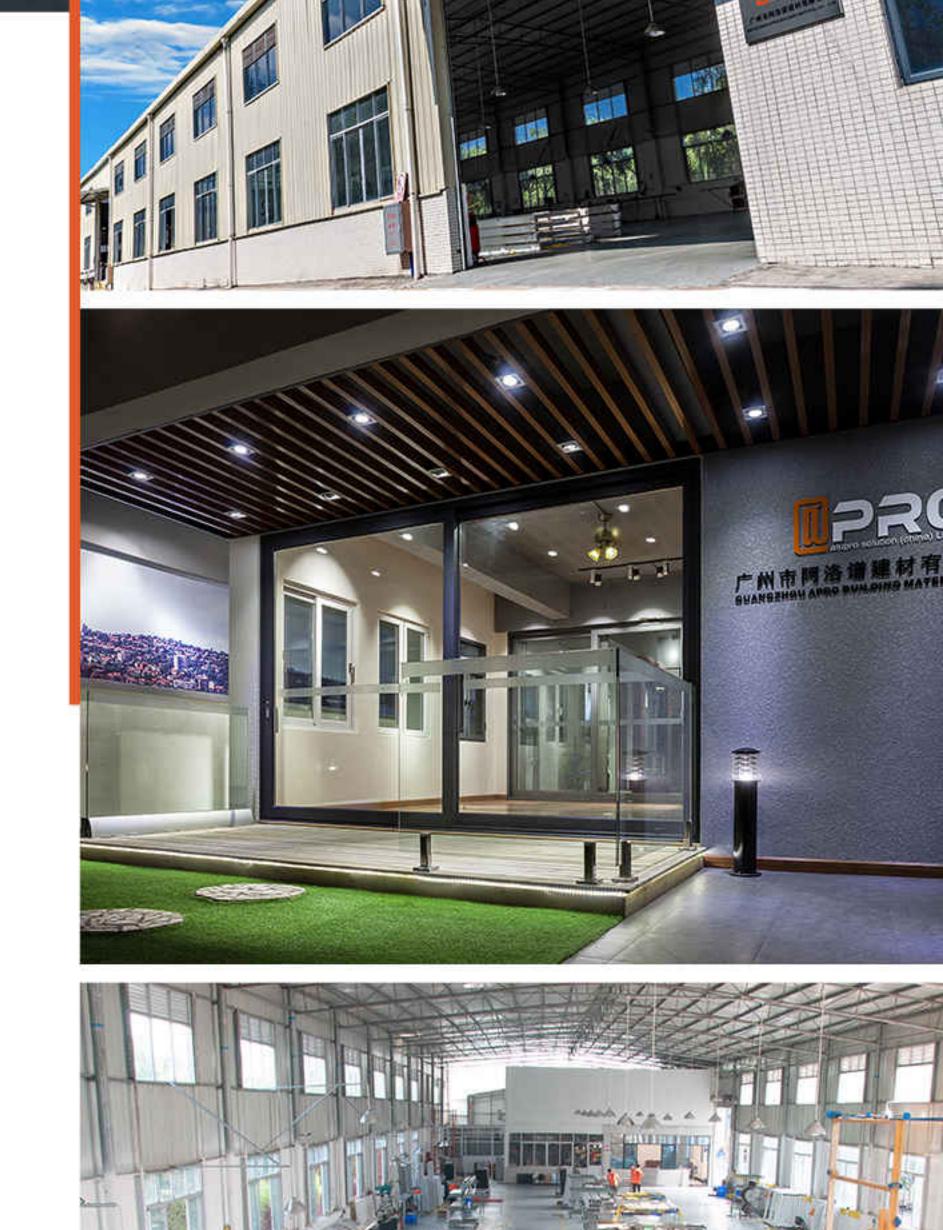






WATER-TIGHTNESS








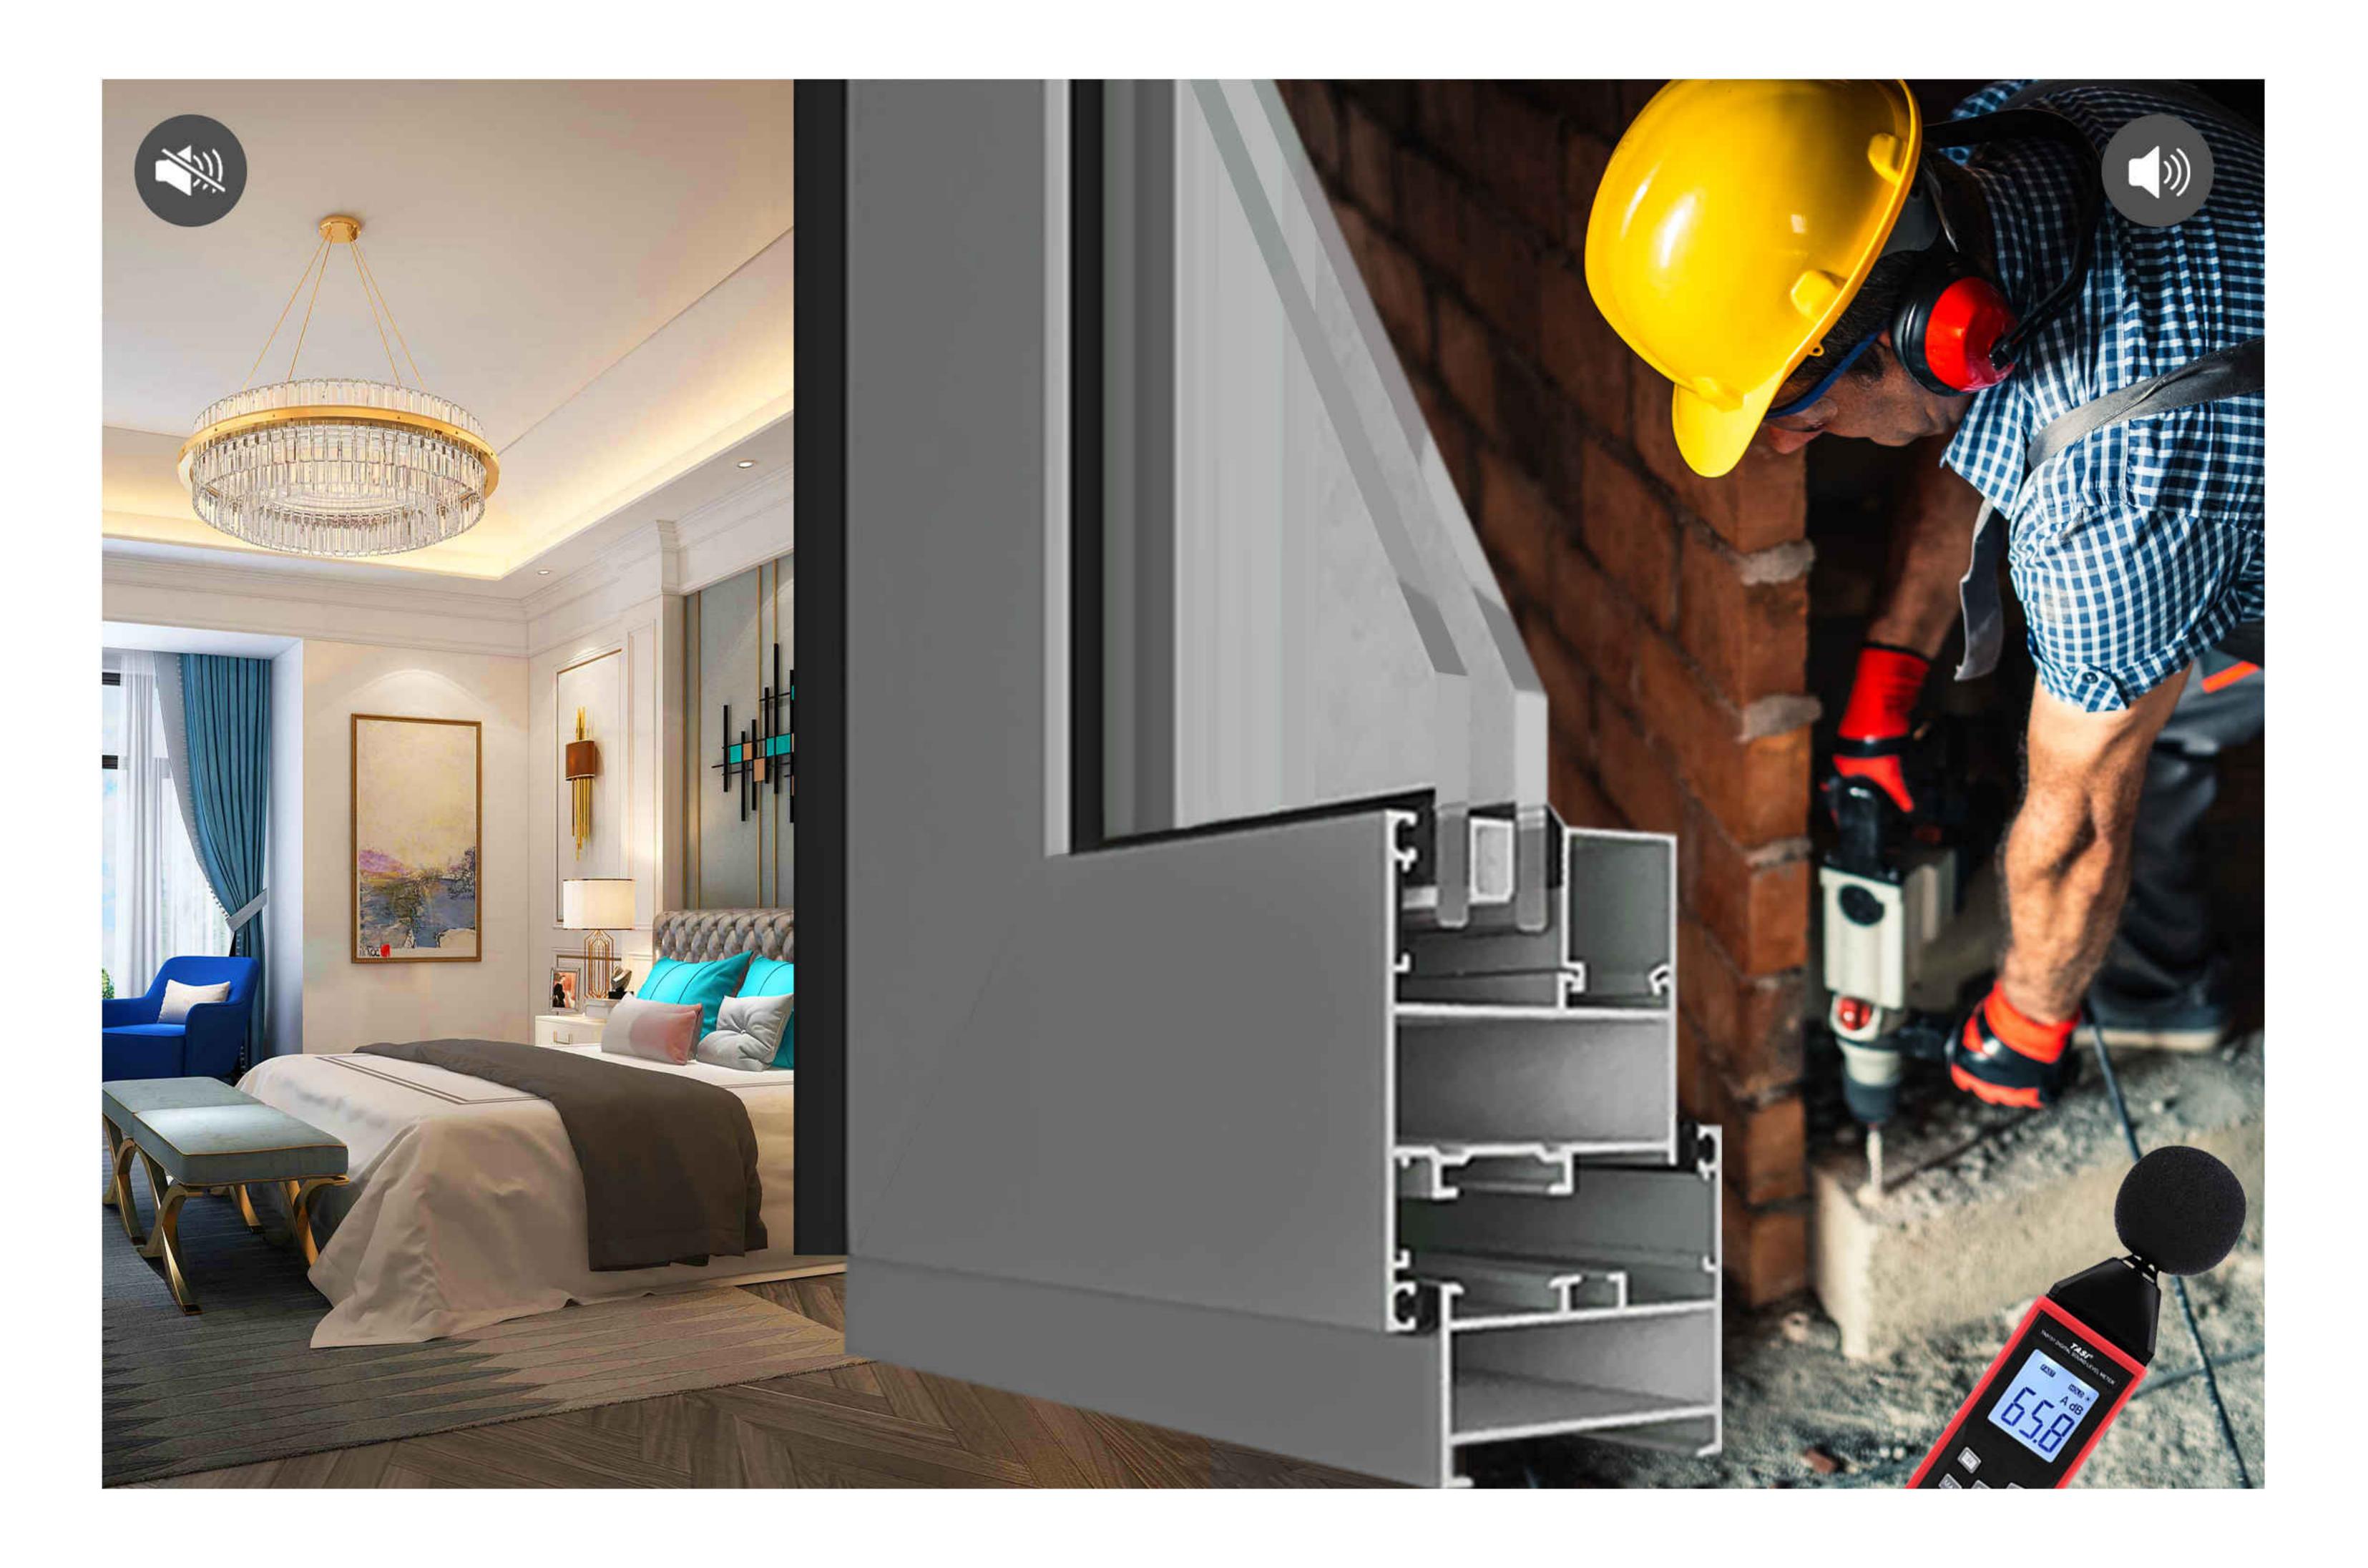

SOUND INSULATION

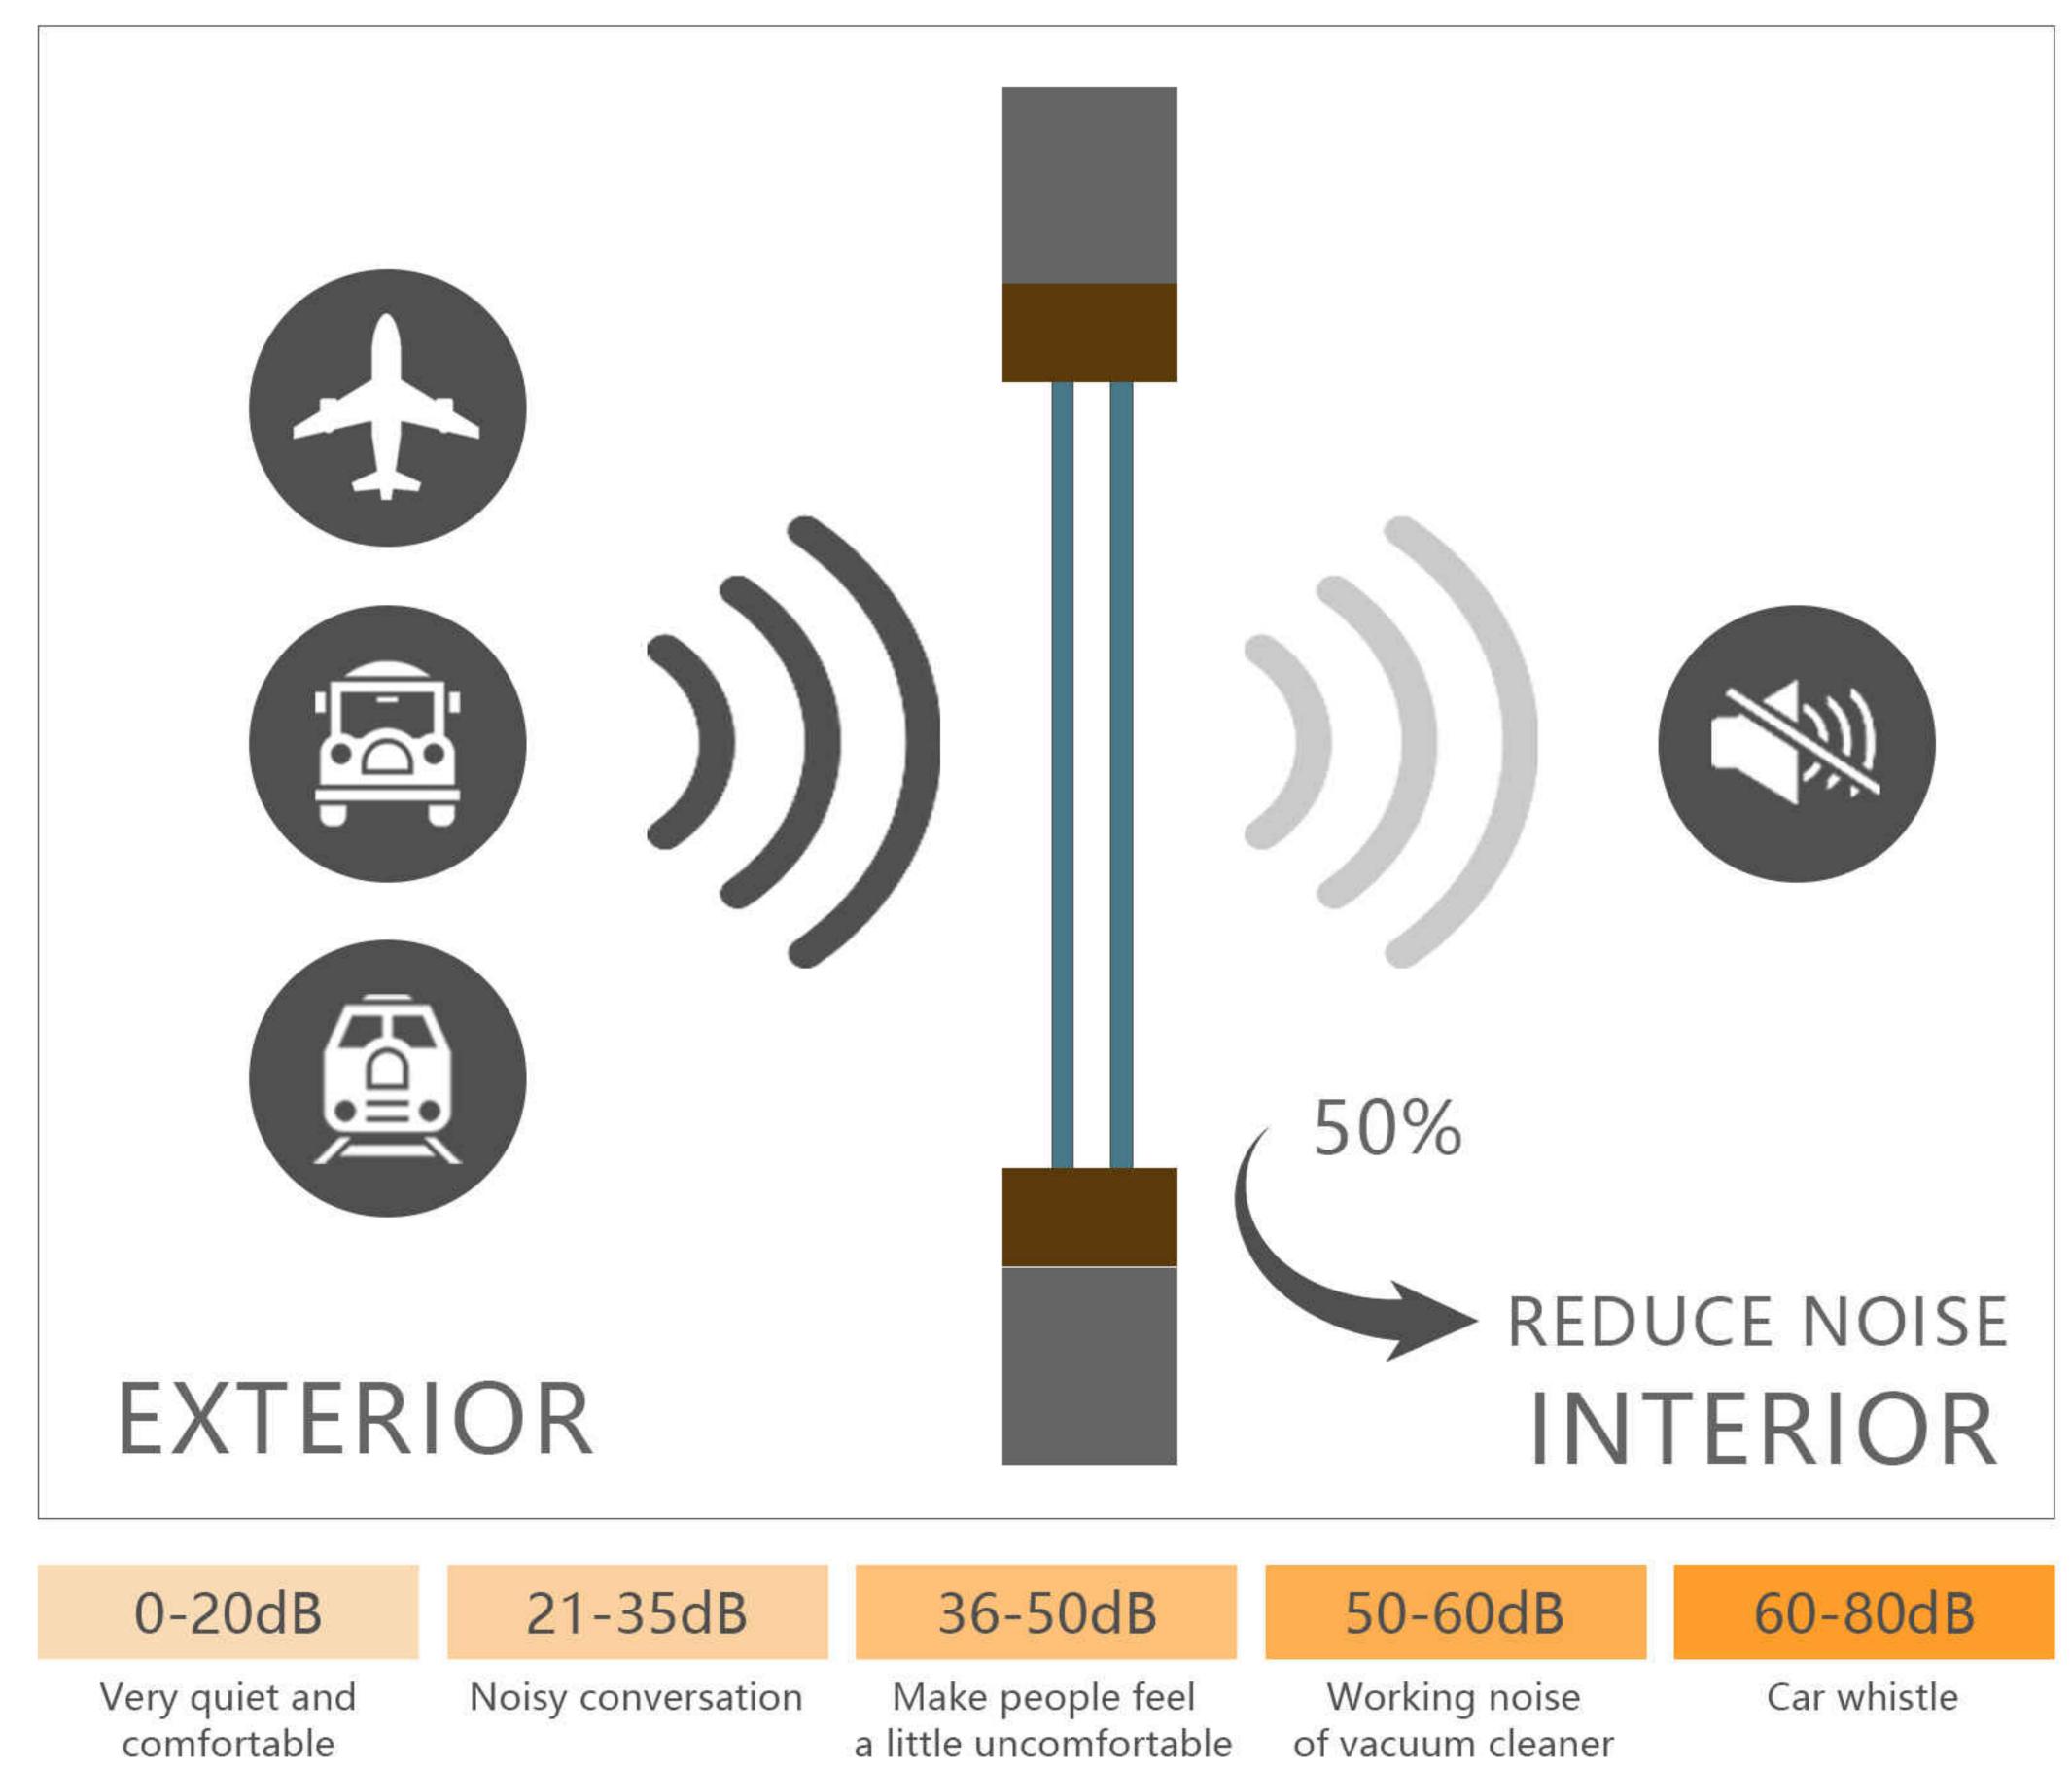

Make people feel a little uncomfortable

Working noise of vacuum cleaner

INSULATION STRIP

LEADING DOOR AND WINDOW INSULATION STRIPS EFFECTIVELY BLOCK HEAT CONDUCTION, SO AS

TO ACHIEVE THE EFFECT OF HEAT PRESERVATION AND HEAT INSULATION

THE RUBBER STRIP HAS GOOD WEATHER RESISTANCE


AND CORROSION RESISTANCE, AND THE SEALING RUBBER STRIP EFFECTIVELY BLOCKS

THE AIRFLOW OF INDOOR AND OUTDOOR WATER.

PLAYED THE ROLE OF SOUND INSULATION AND WATER BLOCKING

USE THE PRINCIPLE OF PRESSURE BALANCE TO DRAIN WATER THROUGH THE DRAIN HOLE



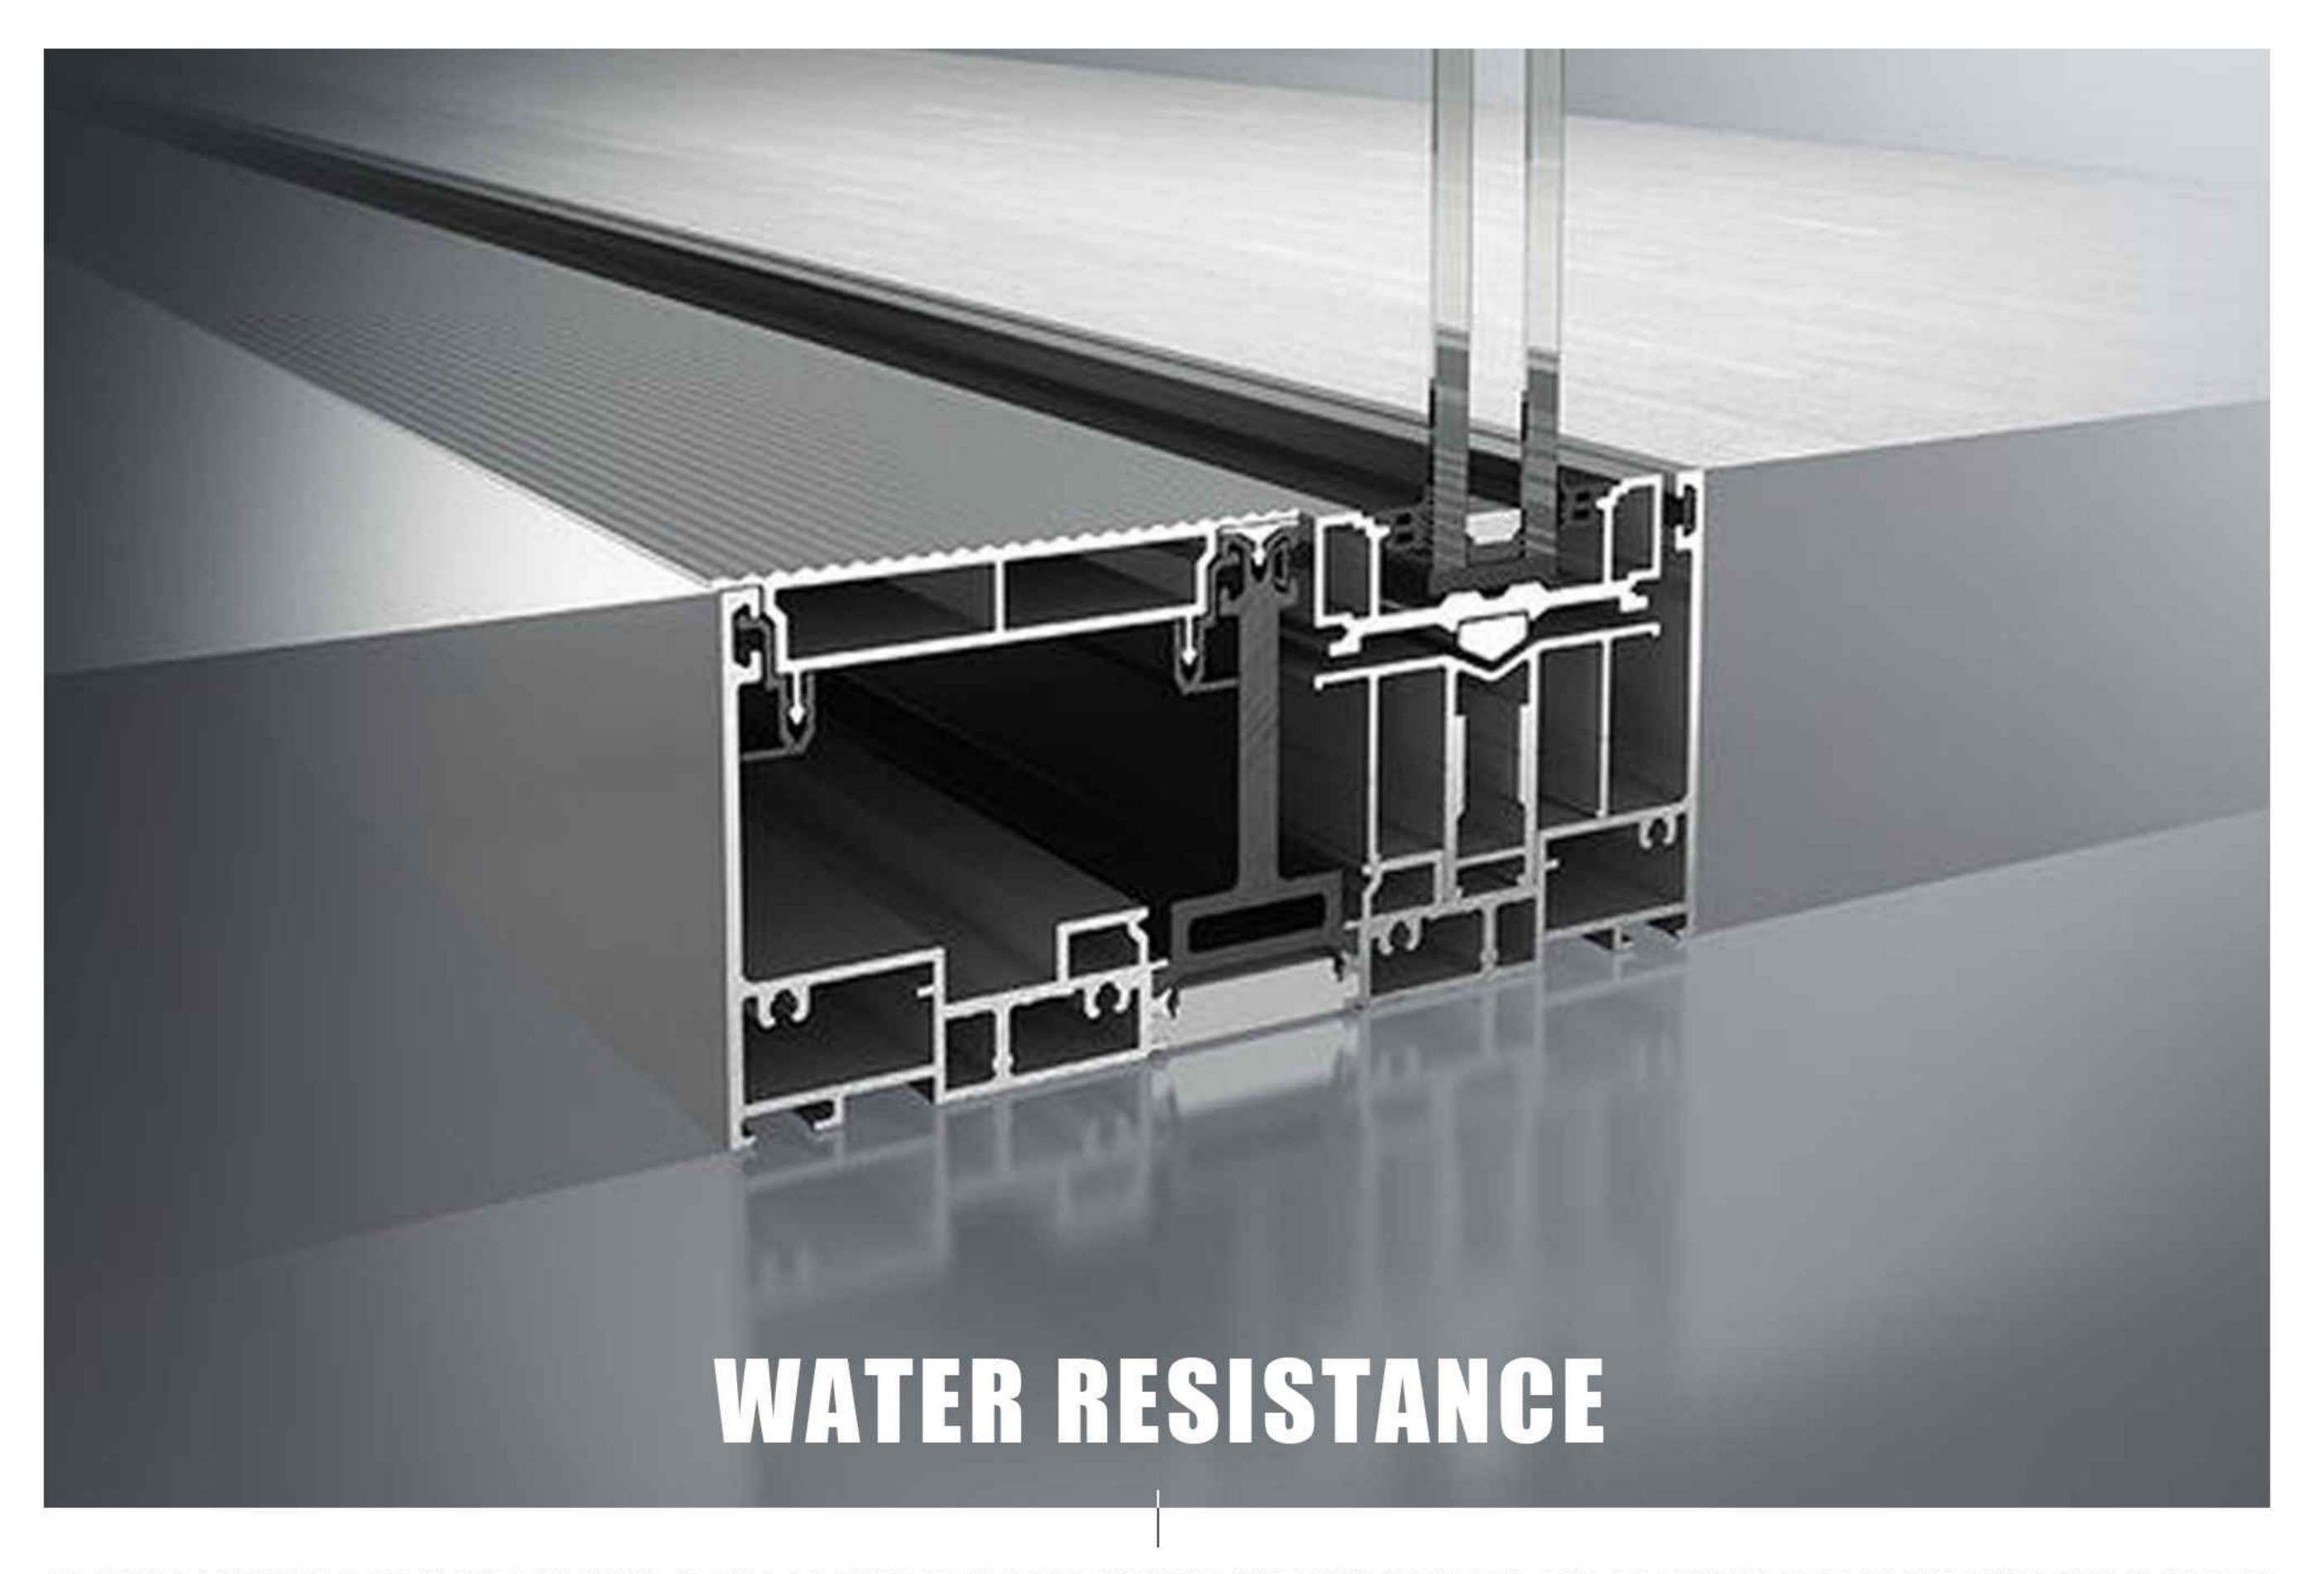

ADOPTING A NEW WINDOW PLATE STRUCTURE, ADDING A DOUBLE DRAINAGE DESIGN FOR THE AUXILIARY FRAME, AND A DRAINAGE PORT ON THE OUTER FRAME SURFACE
EFFECTIVELY SOLVE THE PROBLEM OF WIND AND RAIN INVERSION AND AVOID MILDEW ON THE WALL





TEMPERED GLASS


ENERGY-SAVING SEALED STRUCTURE TEMPERED HOLLOW GLASS, WHICH CAN EFFECTIVELY BLOCK THE CONDUCTION OF HEAT INSULATION, HAS THE EFFECTS OF ENERGY SAVING, SOUND INSULATION, UV PROTECTION, AND ANTI-CONDENSATION




SINGLE GLASS DOUBLE-LAYE- TRIPLE GLASS RED GLASS

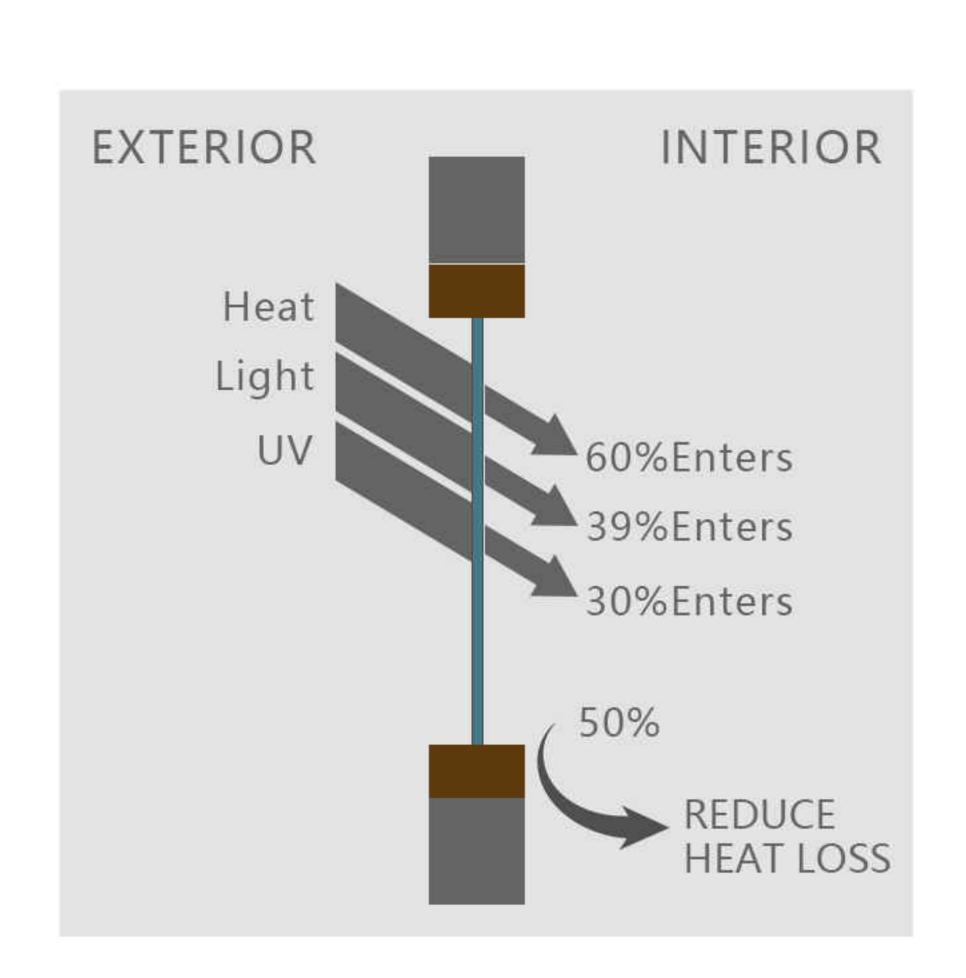

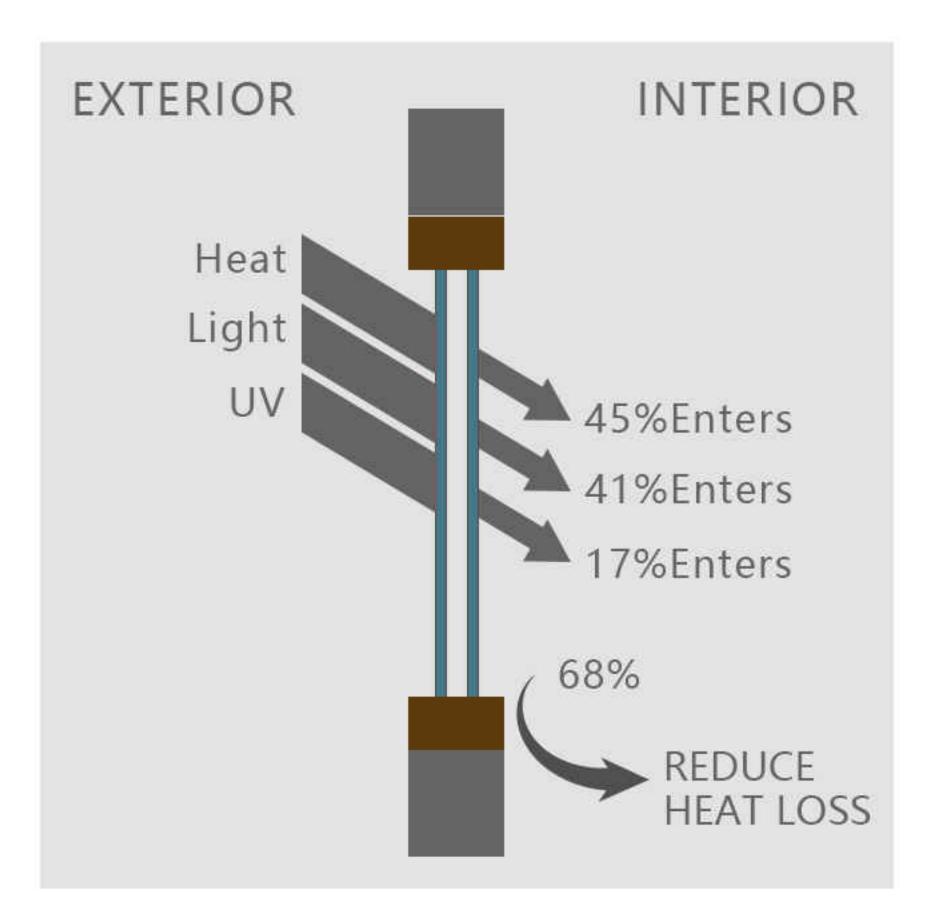

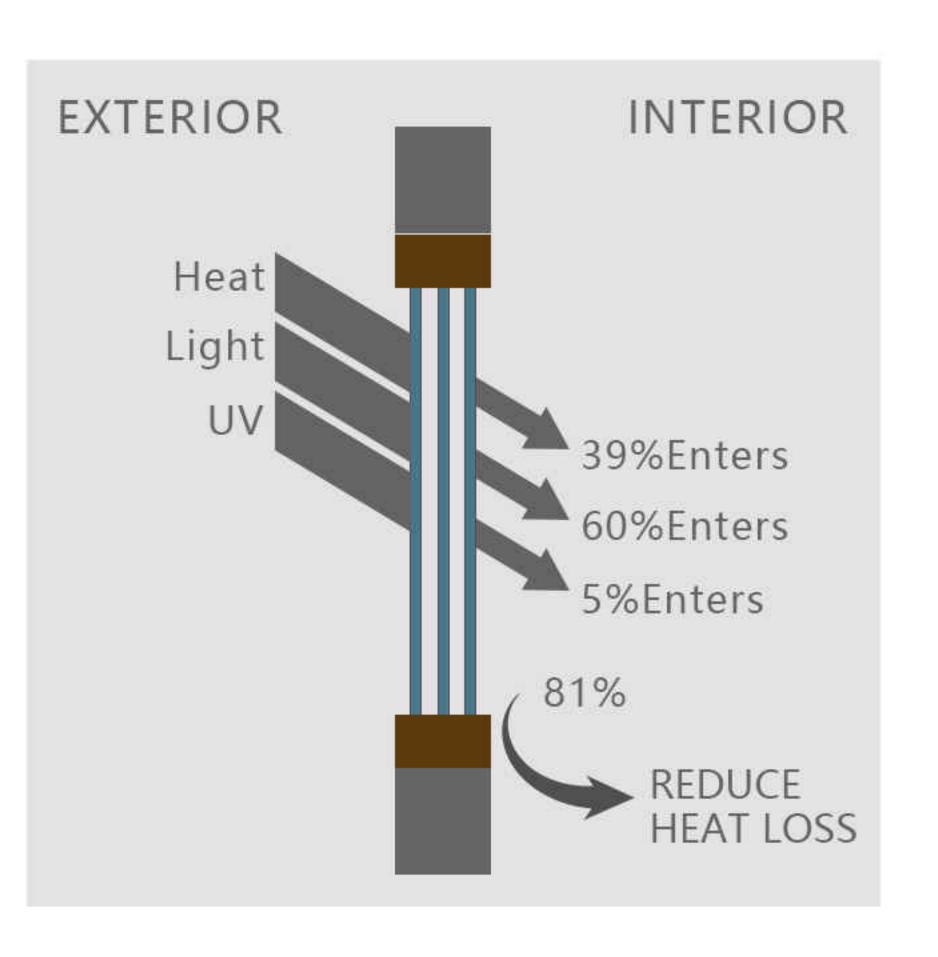




A55 INSWING CASEMENT WINDOW

Casement inside Window	Visible surface	Section Profile Thickness		Size range	Glass Thickness	Maximum load-bearing
55 Series	Glass sash	Wall Thickness	Frame Thickness	Width Height(mm)	5+9+5 48k	18ka
	69.2mm	1.4mm	48.2mm	850 1500	3+3+3	48kg



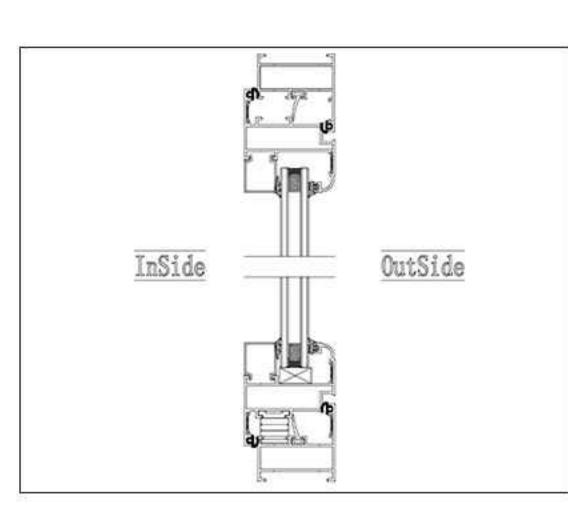



- The whole window structure is strong, durable and fashionable.
- Casement windows are the best for controlling the breezes inside for better ventilation.
- Available with screen options.
- The various design features available include: French, pushout, flat top and multiple grill configurations.











	Casement outside Window	Visible surface	Section Profile Thickness		Size range	Glass Thickness	Maximum load-bearing
	55 Series	Glass sash	Wall Thickness	Frame Thickness	Width Height(mm)	5+9+5	48kg
		69.2mm	1.4mm	48.2mm	850 1500	3+3+3	4000



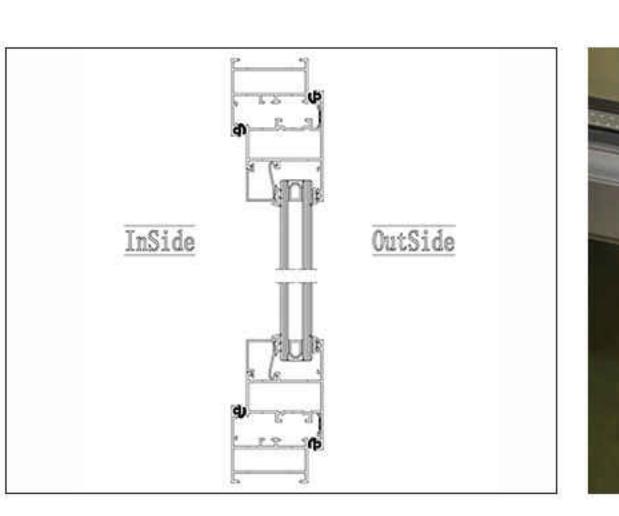




- The whole window structure is strong, durable and fashionable.
- Casement windows are the best for controlling the breezes inside for better ventilation.
- Available with screen options.
- The various design features available include: French, pushout, flat top and multiple grill configurations.



A55 AWNING WINDOW

Aluminum Awning Window	Visible surface	Section Profile Thickness		Size range	Glass Thickness	Maximum load-bearing
55 Series	Glass sash	Wall Thickness	Frame Thickness	Width Height(mm)	5+9+5	18ka
	69.2mm	1.4mm	48.2mm	850 1500	3+3+3	48kg



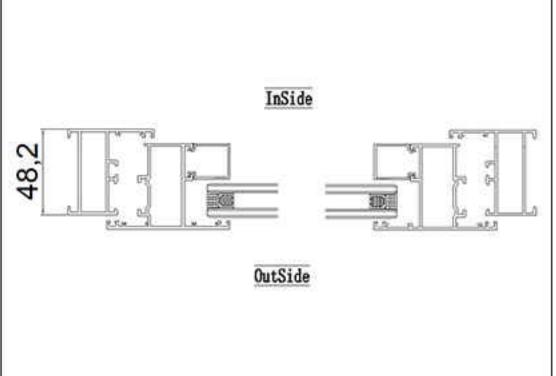



- Diversified product range enables all areas and scenarios to find its mostsuitable products
 to meet various needs on style and function. Innovative items such as window-door and
 double inswing window etc. can exceed your expectation to meet your needs that you may
 not even notice, and thus to lead the market trend.
- Full series apply corner glue injection process to achieve high joint strength.
- Abundant mullion joint sealing accessories and concealed drainage have largely improved water tightness.
- What'smore, premium EPDM gaskets have enhanced the air tightness and water tightness.










A55 TILT AND TURN WINDOW


	Tilt And Turn Window	Visible surface	Section Profile Thickness		Size range	Glass Thickness	Maximum load-bearing
	55 Series	Glass sash	Wall Thickness	Frame Thickness	Width Height(mm)	5 . O . 5	48kg
		69.2mm	1.4mm	48.2mm	850 1500	5+9+5	40Kg



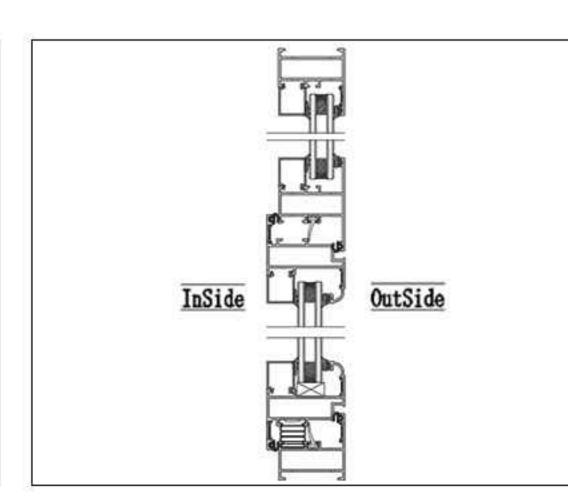




- Adopting the European standard design, effectively improve the sound insulation
 effect and the overall insulation performance, and prevent indoor and outdoor thermal
 energy transmission, energy saving, environmental protection, comfort.
- Adopting complex three frames design, strong rigidity, with the independent drainage system, which makes the window drainage is smooth, and it does not have the rain water pouring.
- Choosing high quality aluminum alloy and advanced surface treatment, the whole window structure is stronger, more durable, beautiful and fashionable.
- By fitting different accessories can be applied to single tilt inside, single turn inside, or tilt and turn in a various of open ways.




A55 INSWING DOOR

Casement inside Door	Visible surface	Section Profile Thickness		Size range	Glass Thickness	Maximum load-bearing
55 Corios	Glass sash	Wall Thickness	Frame Thickness	Width Height(mm)		90ka
55 Series	89.7mm	2.0mm	48.2mm	850 2500	3+3+3	Sukg



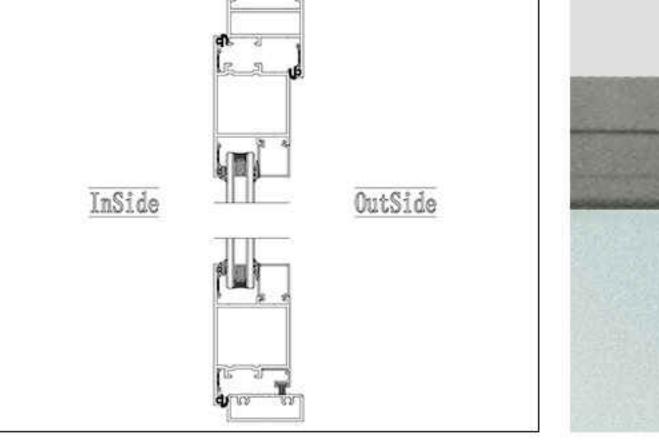

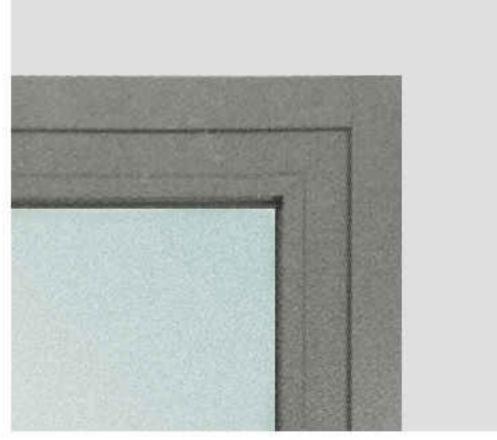

- Clean contemporary designs that maximize glass and light.
- Durable double leaf bearing hinges for large panel weights.
- Flush threshold options are available.
- Wide range of glazing options for improved thermal performance, safety protection and privacy.











A55 OUTSWING DOOR


	Casement outside Door	Visible surface	Section Profile Thickness		Size range	Glass Thickness	Maximum load-bearing
	55 Series	Glass sash	Wall Thickness	Frame Thickness	Width Height(mm)	5+9+5	90kg
		89.7mm	2.0mm	48.2mm	850 2500	3+3+3	Juky



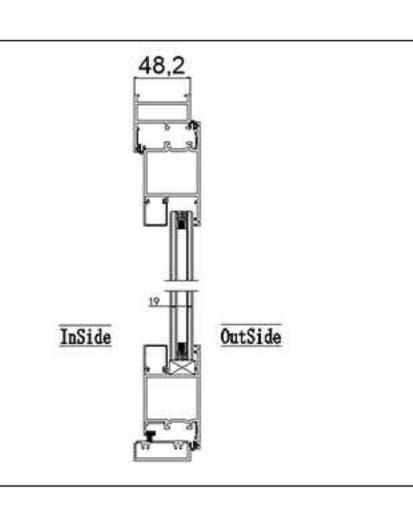

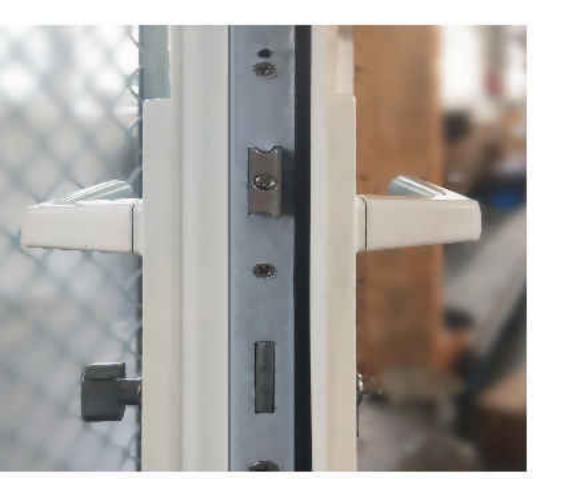



- This system is perfect for residential and commercial projects as entry doors or as an interior space divider.
- Adding an aluminum glass swing door to your space will provide your home with natural light.
- Can add push/pull hardware and locking mechanisms.
- Outswing can save the interior space.



A76 SLIDING WINDOW

Aluminum Sliding Window	Visible surface	Section Profile Thickness		Size range	Glass Thickness	Maximum load-bearing
76 Series	Glass sash Flyscreen sash	Wall Thickness	Frame Thickness	Width Height(mm)	5+9+5	40kg
	72mm 48mm	1.4mm	76mm	1500 2200	3+3+3	40kg

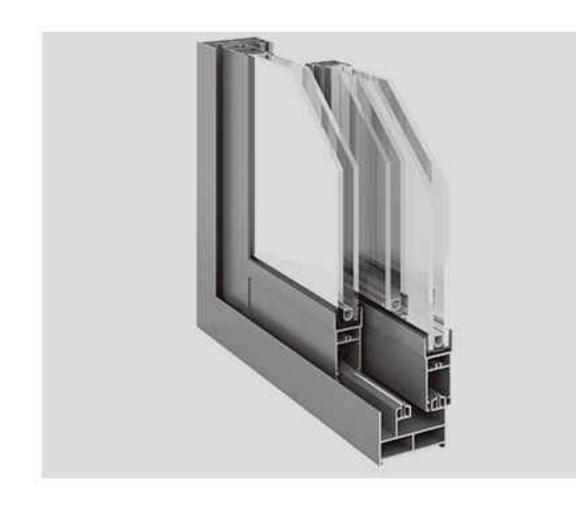

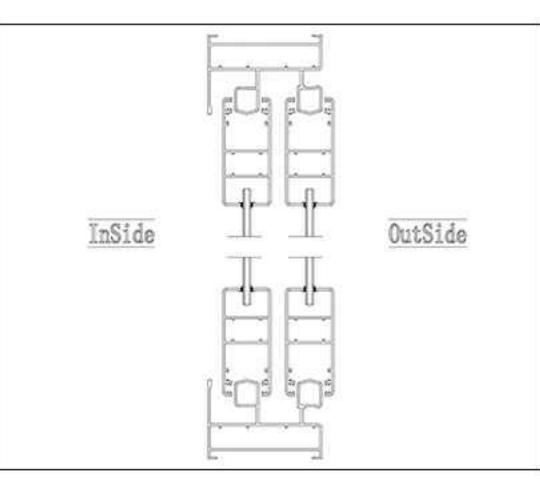



- Adopting European standard, Our system has a great performance in sound insulation an heat insulation, which mean energy-saving, environmental protection and comfort.
- Triple-cavity, strong rigidity, is a special drainage process to make the smooth drainage, no rain backflow.
- All rubber seals are indoor matching the muti-point lock which are firm and good security.
- High quality aluminum alloy profiles and advanced finishing make it solid, durable, morden and fashionable.












Aluminum Sliding Door	Visible surface	Section Profile Thickness		Size range	Glass Thickness	Maximum load-bearing
120 Carias	Glass sash	Wall Thickness	Frame Thickness	Width Height(mm)	5+9+5	1.40kg
120 Series	90mm	2.0mm	116mm	2500 3000	5+9+5	140kg

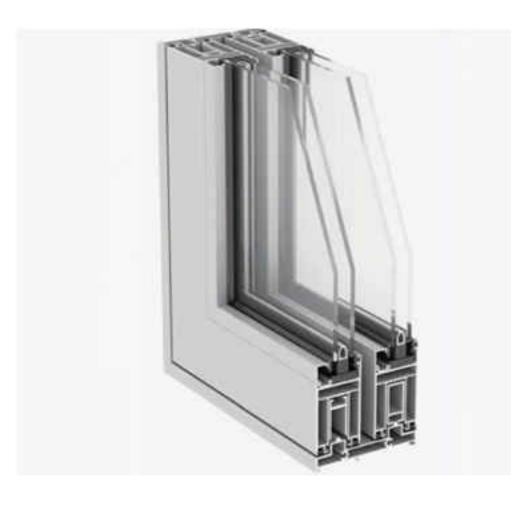

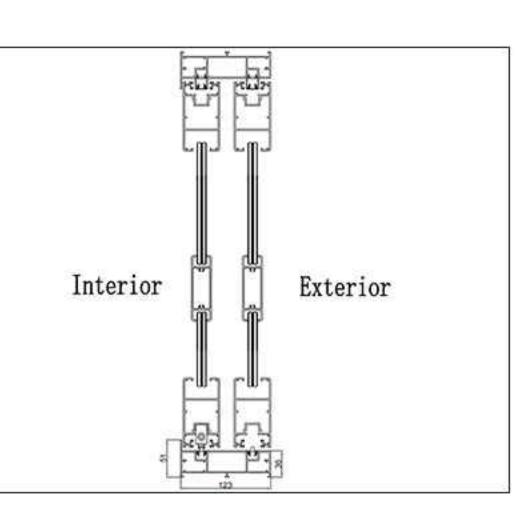




- High load bearing, suitable for large open panoramic door.
- Flyscreen tack can be the same as the door frame.
- Triple track is available.
- Better tightness when closed.
- Achieving a flush threshold for sliding door.

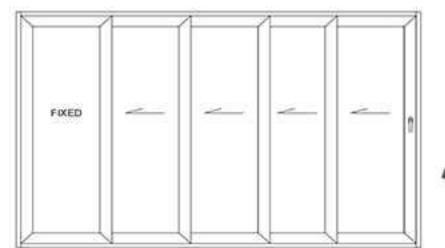


A300 MULTI-SLIDING DOOR

Aluminum Sliding Door	Visible surface	Section Profile Thickness		Size range	Glass Thickness	Maximum load-bearing
170 Series	Glass sash Flyscreen sash	Wall Thickness	Frame Thickness	Width Height(mm)	5+9+5 140kg	
	82mm 84.4mm	2.0mm	170mm	2000 3000	3+9+3	14000



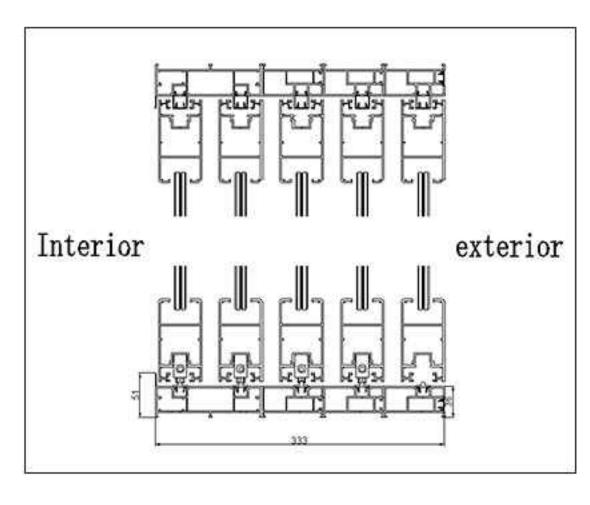

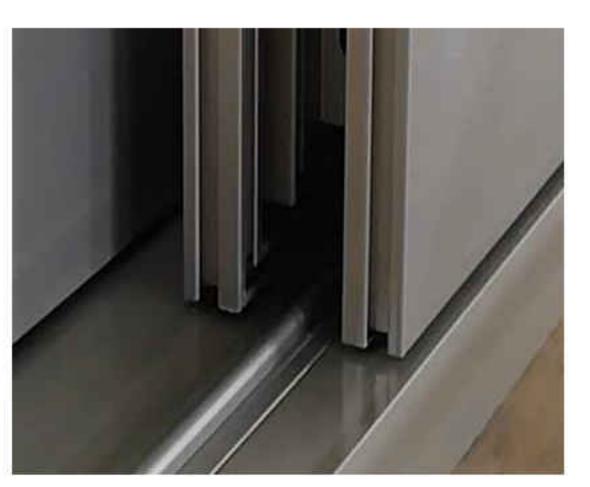

- A variety of ways to open way.
- Can be hidden in a wall as pocket door.
- Can be multi-tracked as you like.
- Achieving a flush threshold for sliding door










Aluminum Folding Door	Visible surface	Section Profile Thickness		Size range	Glass Thickness	Maximum load-bearing
EO Corios	Glass sash	Wall Thickness	Frame Thickness	Width Height(mm)	5+9+5	60kg
50 Series	61.5mm	2.0mm	50mm	800 2500		June








- Adopting European Design Regular, effectively improve the performance of sound insulation and energy efficiency.
- Folding design can give the biggest clear opening and enjoy wide-open view.
- The weight capacity of bottom sliding track system can be 80KG, it will operate smoothly and effortlessly.
- Bottom rail design is with double waterproof rubber and drainage system, totally solve the problem of rubber ageing and leaking.



In-swing windows/ doors hardwares




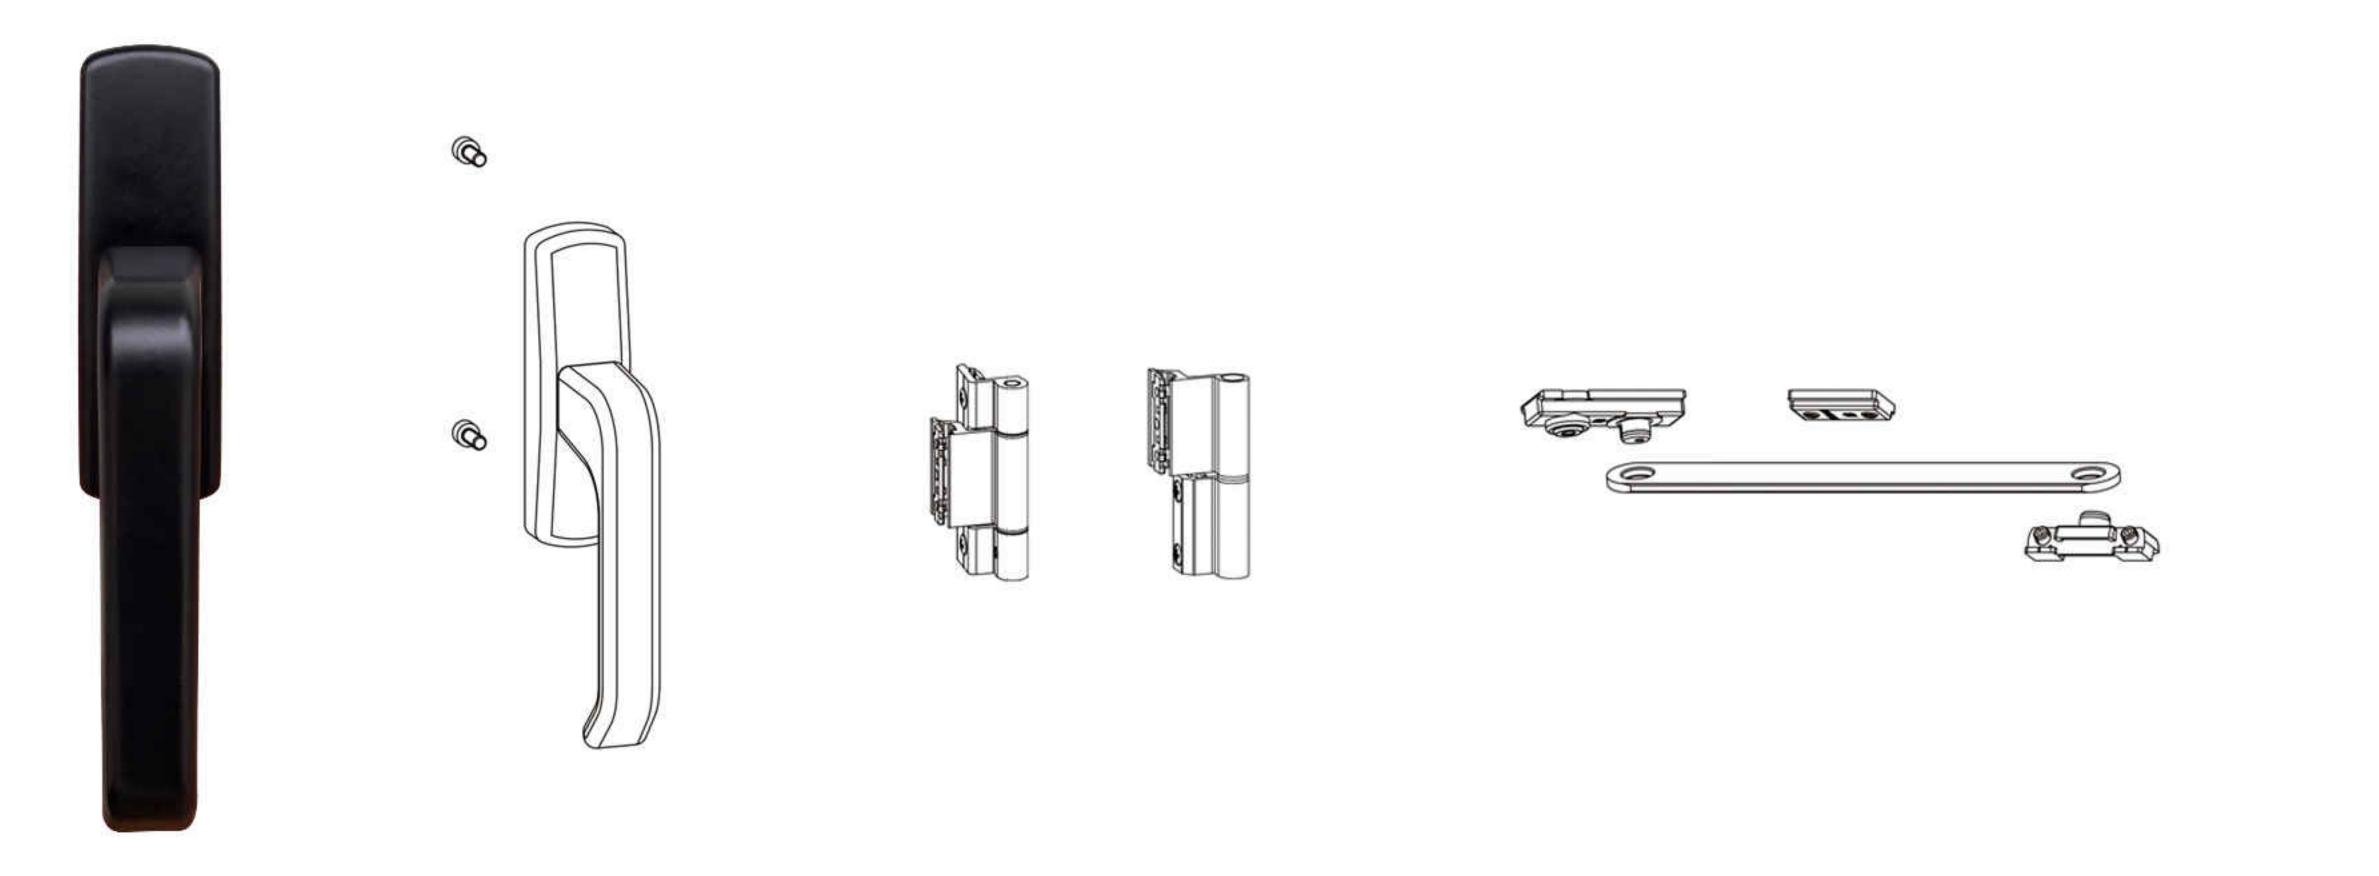

P/N	Materials	Suitable for
G-46551	Aluminum alloy	Inward/ outward casement window Awning window
Powder coatin	σ	


G-46331	Aluminum alloy	Awning window
Powder coating	5	
White/Black		






Tilt and turn window hardwares



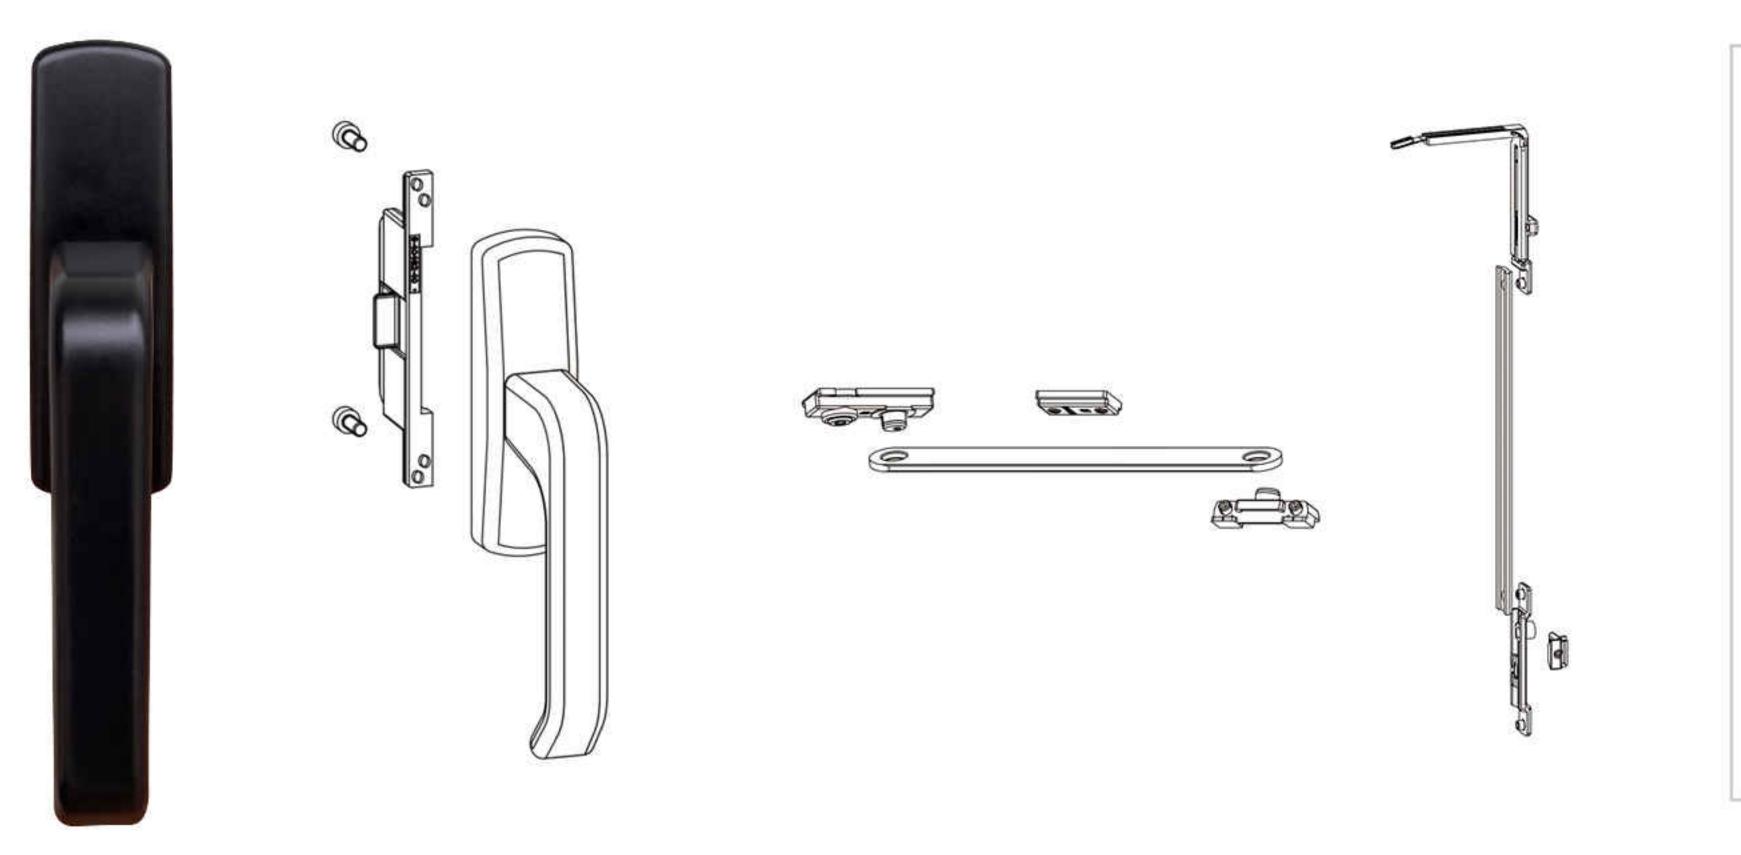

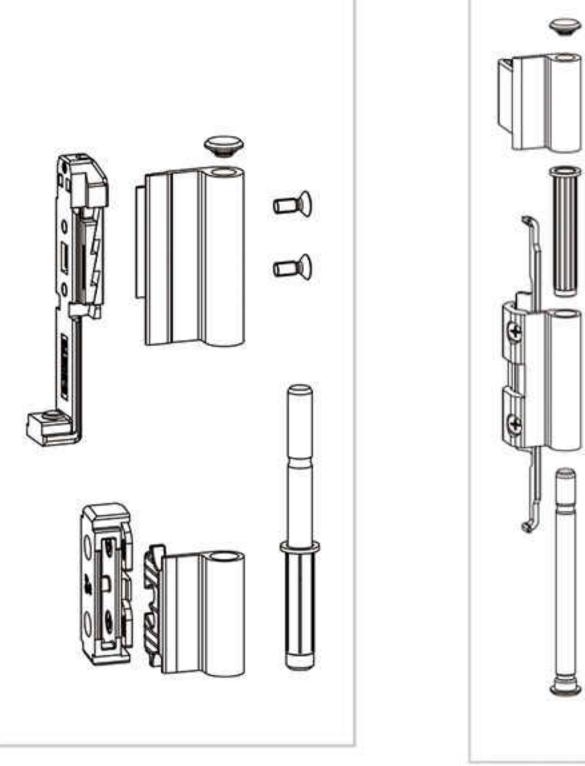

P/N	Materials	Suitable for
G-46551	Aluminum alloy	Tilt and turn window Awning window






Mat Black








Out-swing windows/doors hardwares




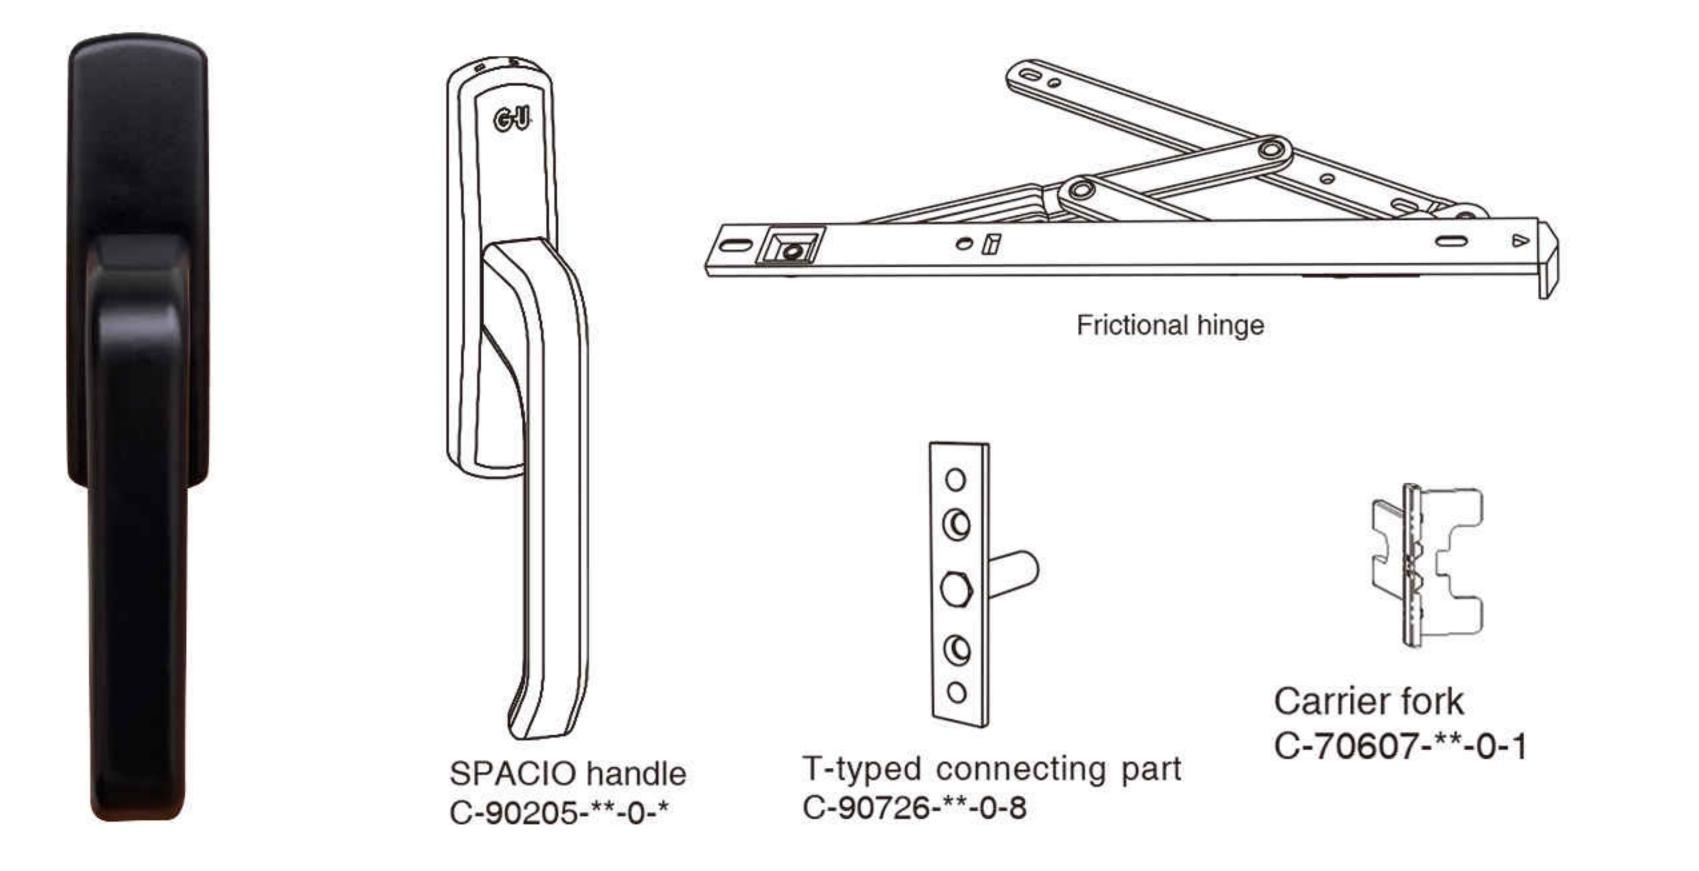


P/N	Materials	Suitable for
C-90616	Aluminum alloy	Hinged door

Powder coating


Silver

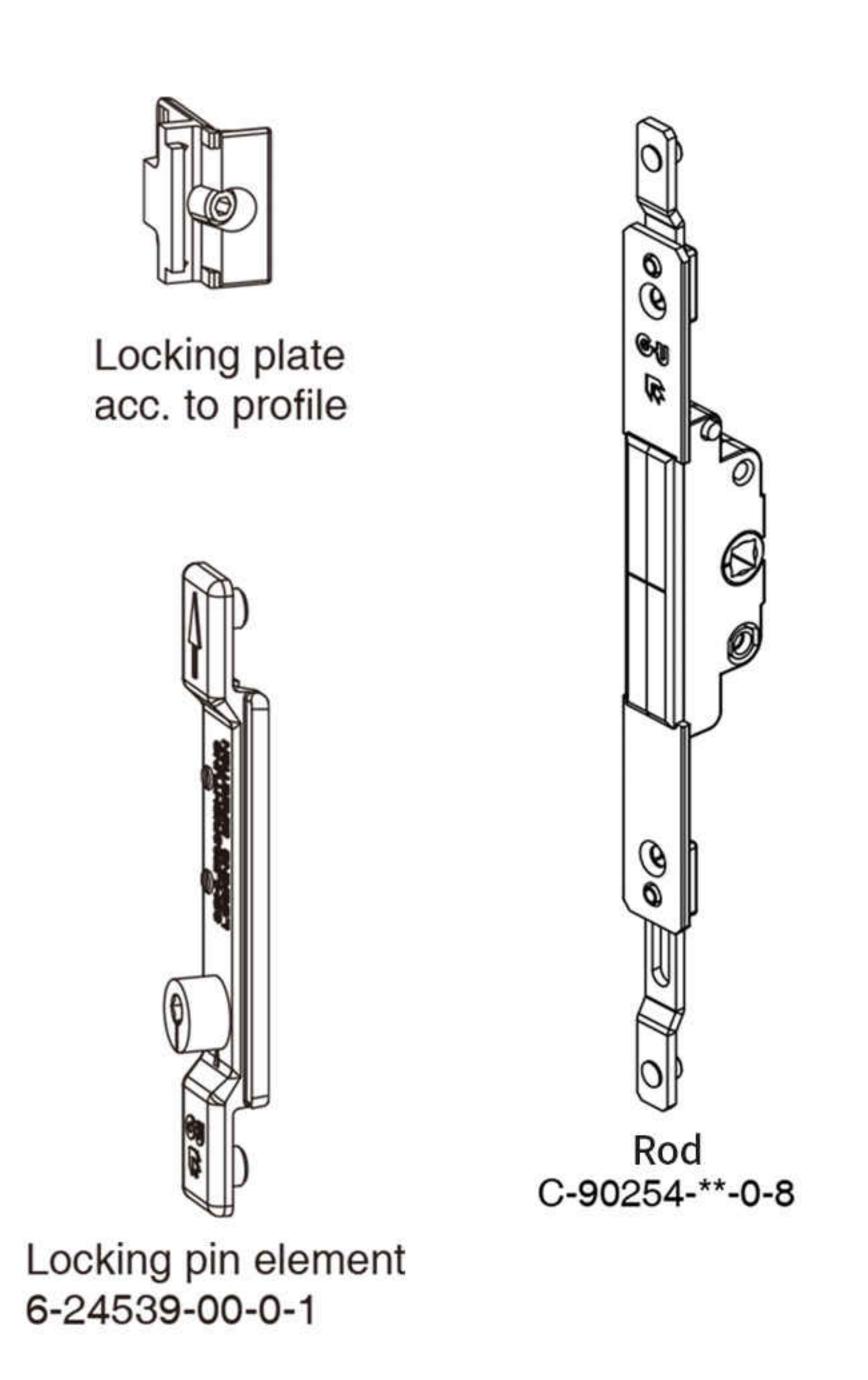



Sliding door hardwares




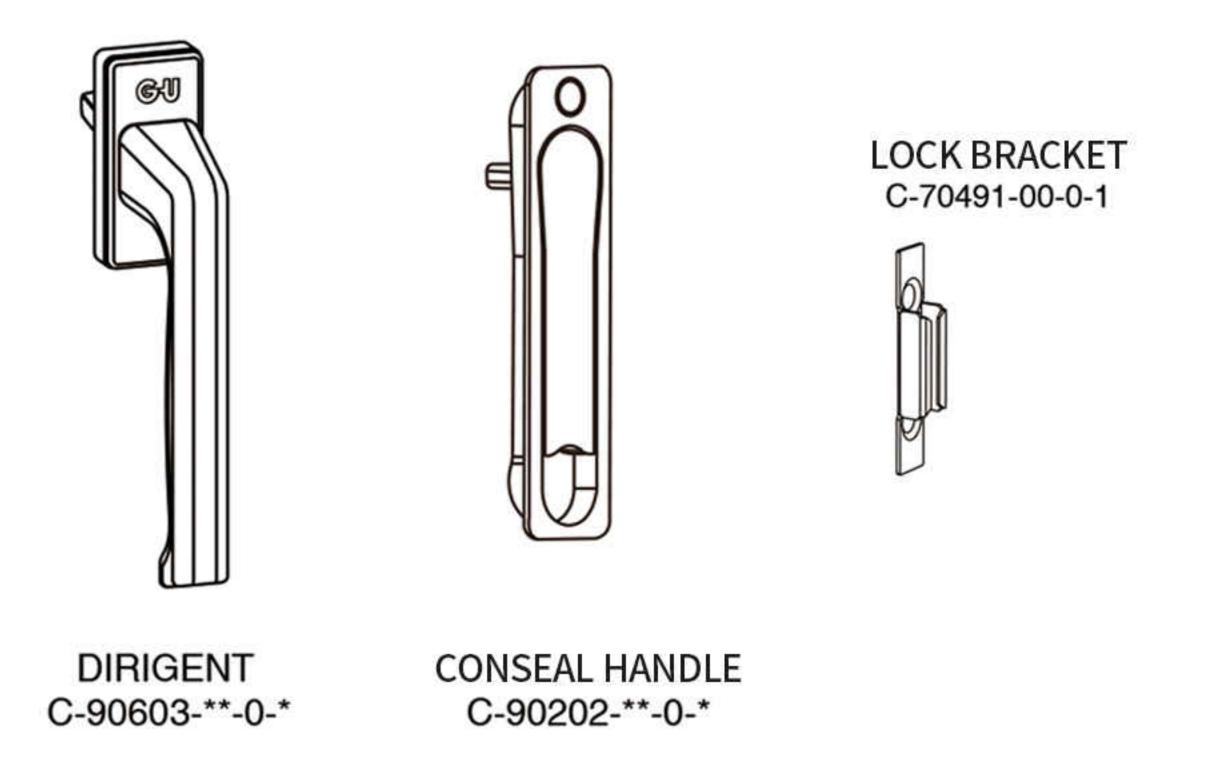


P/N	Materials	Suitable for
C-90603	Aluminum alloy	Sliding door

Powder coating

Silver

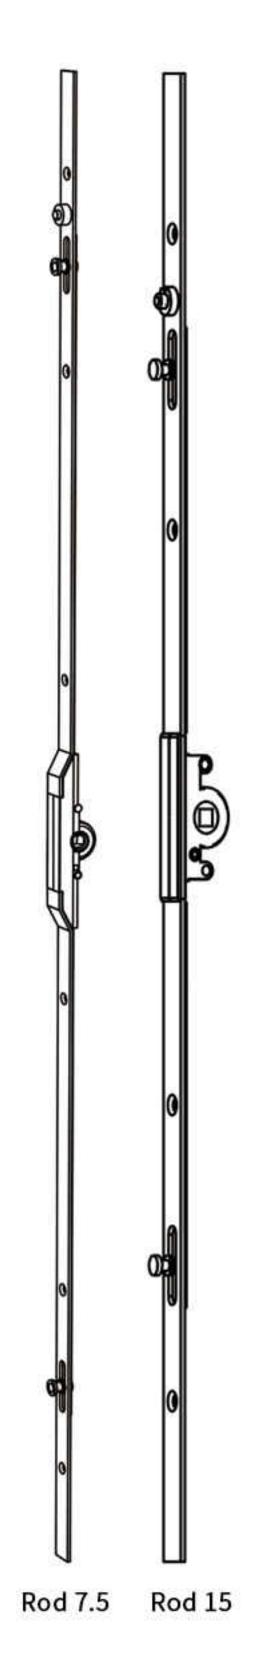



Lift and sliding door hardwares







P/N	Materials	Suitable for
C-13785	Aluminum alloy	Lift and sliding door

(°°) Aluminum color









- Quantity: 260 sqm

- Product: Window&Door

- Location: Nigeria

- Client:Architect

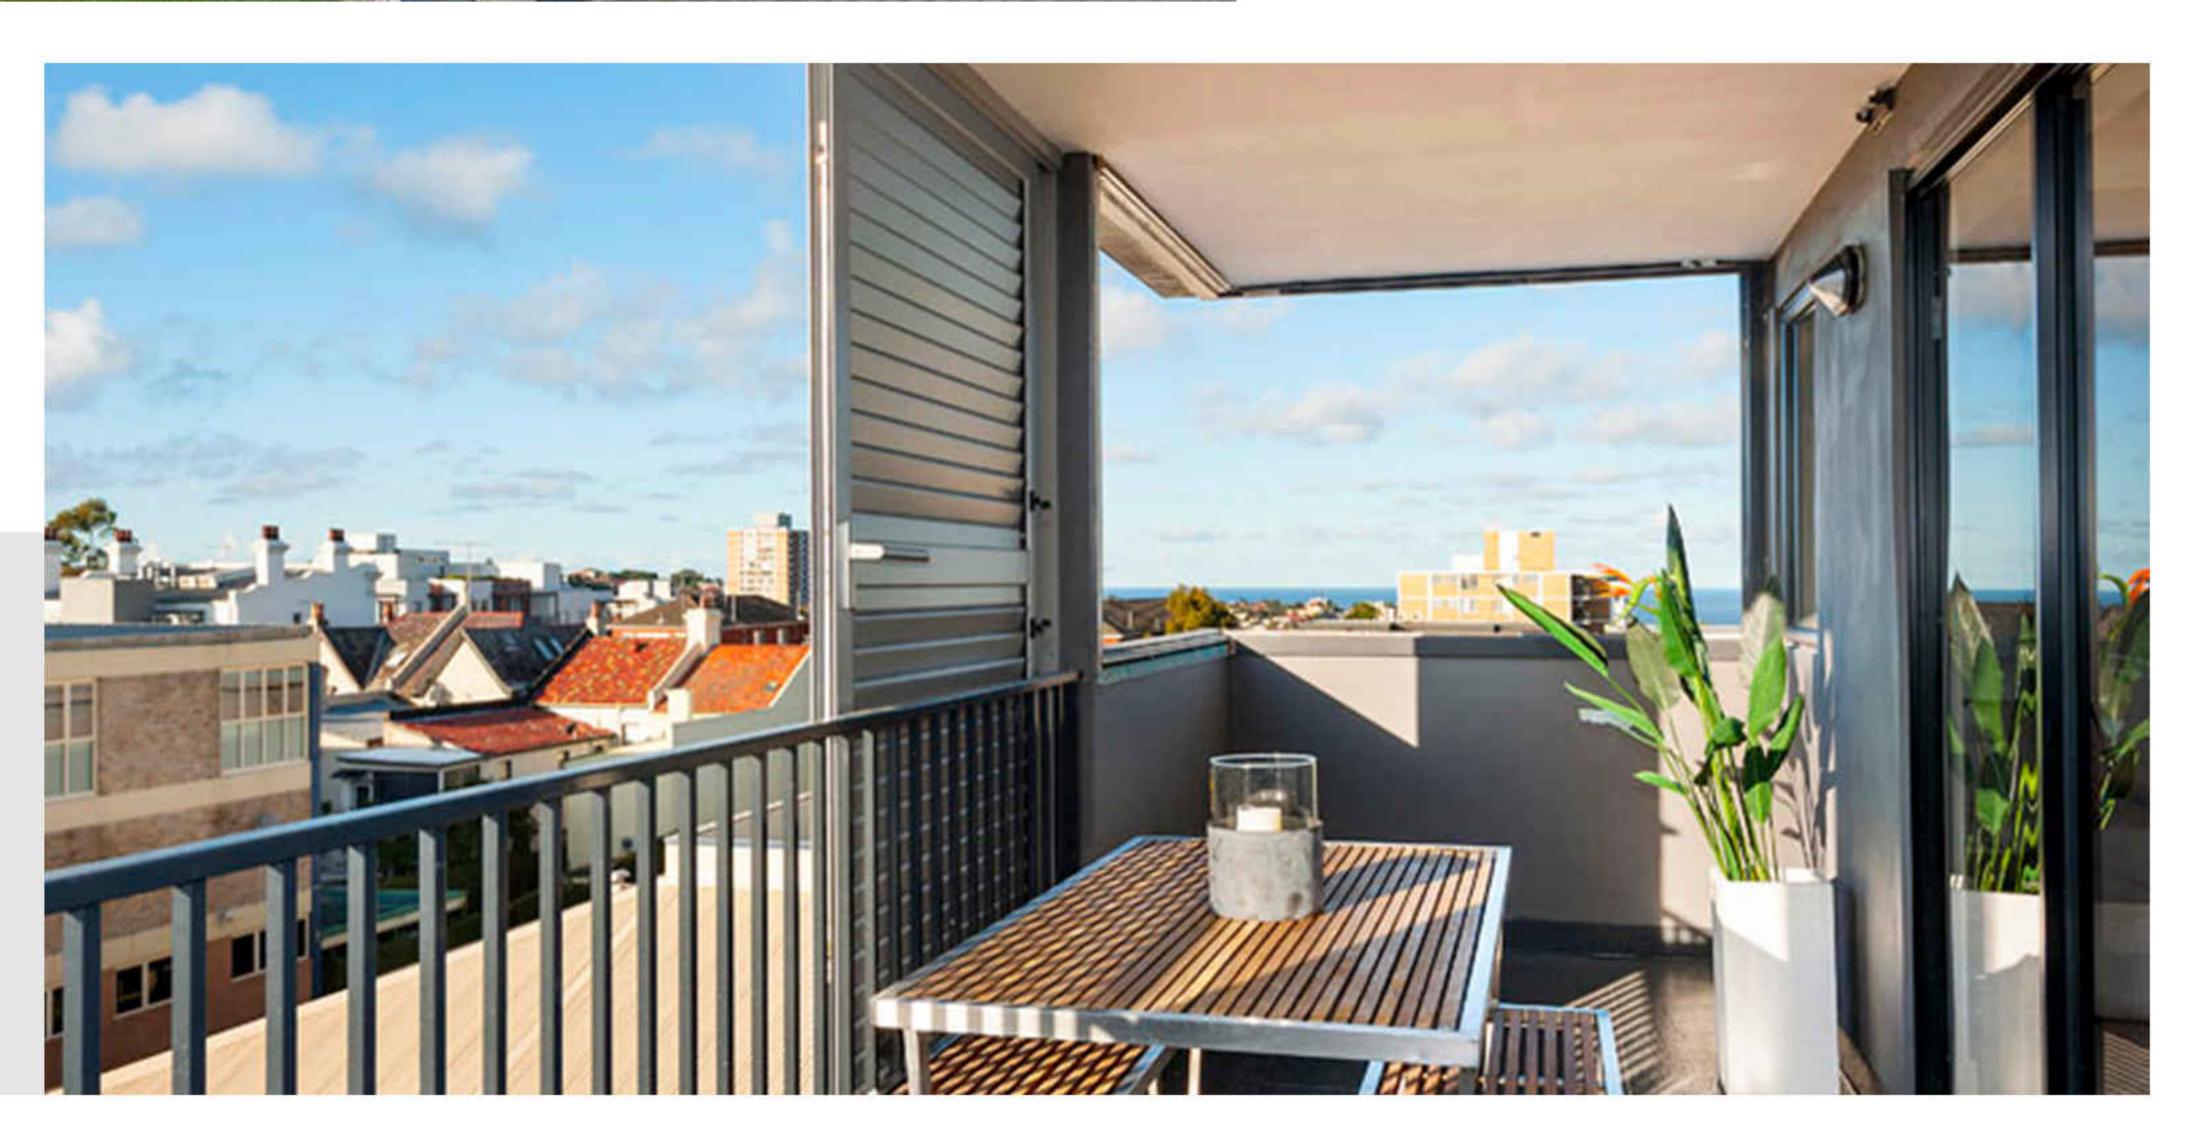

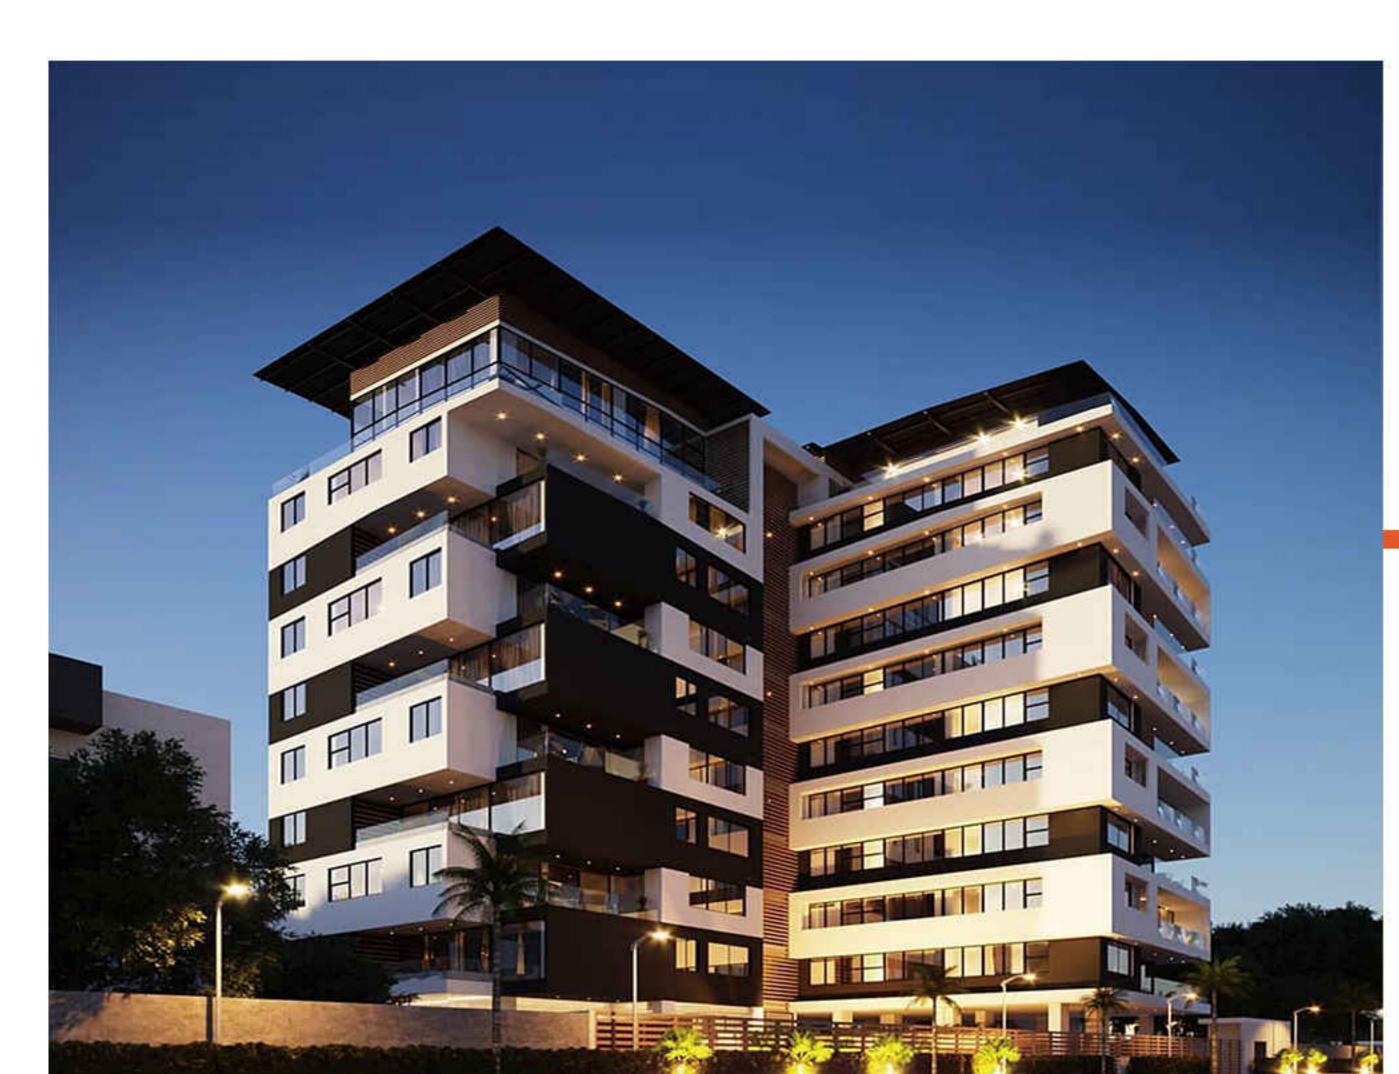


- Year: 2018

- Quantity: 1000 sqm

- Product: Window&Door

- Location: Ghana

Client:Contractor



- Quantity: 460 sqm

- Product: Window&Door

- Location: Ghana

- Client:Owner





- Quantity: 600 sqm

- Product: Window&Door

- Location: Sydney

- Client:Developer





- Quantity: 750 sqm

- Product: Window&Door

- Location: Melbourne

- Client:Developer

- Year: 2017

- Quantity: 460 sqm

- Product: Window&Door

- Location: Ghana

- Client:Owner








- Quantity: 120 sqm

- Product: Window&Door

- Location: Australia

- Client:Owner





- Quantity: 850 sqm

- Product: Window&Door

- Location: Peru

- Client:Contractor









- Quantity: 1300 sqm

- Product: Window&Door

- Location: Angola

Client: Architect







- Year: 2018

- Quantity: 350 sqm

- Product: Window&Door

- Location: Trinidad and Tobago

- Client: Contractor




- Year: 2019

- Quantity: 950sqm

- Location: Panama

- Client: Developer

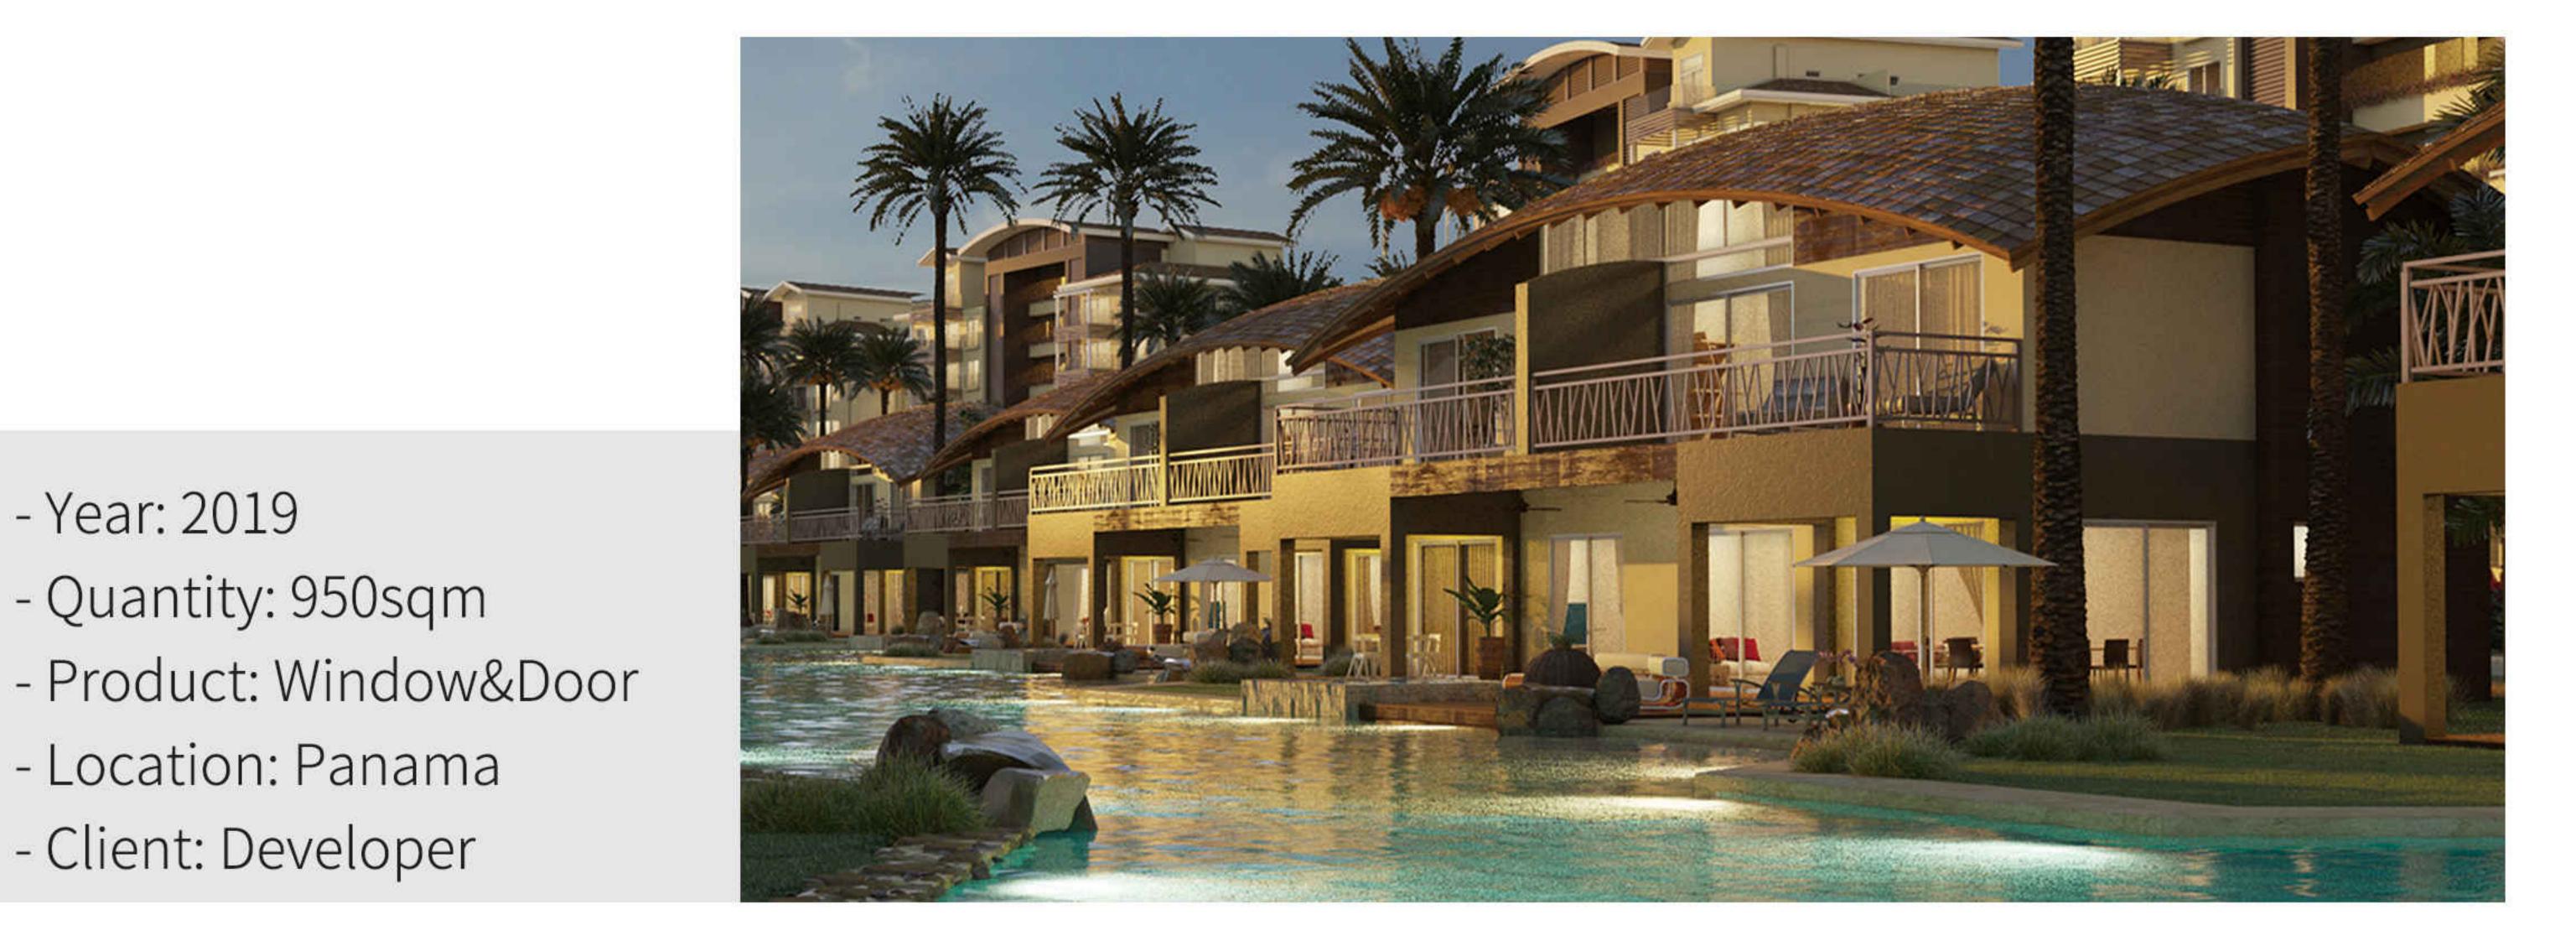

- Year: 2021

- Quantity: 753 sqm

- Product: Interior Hinge Door

- Location: Florida, US

- Client: Contractor




- Quantity: 7000 sqm

- Product: Window&Door


- Location: Uruguay

- Client: Contractor

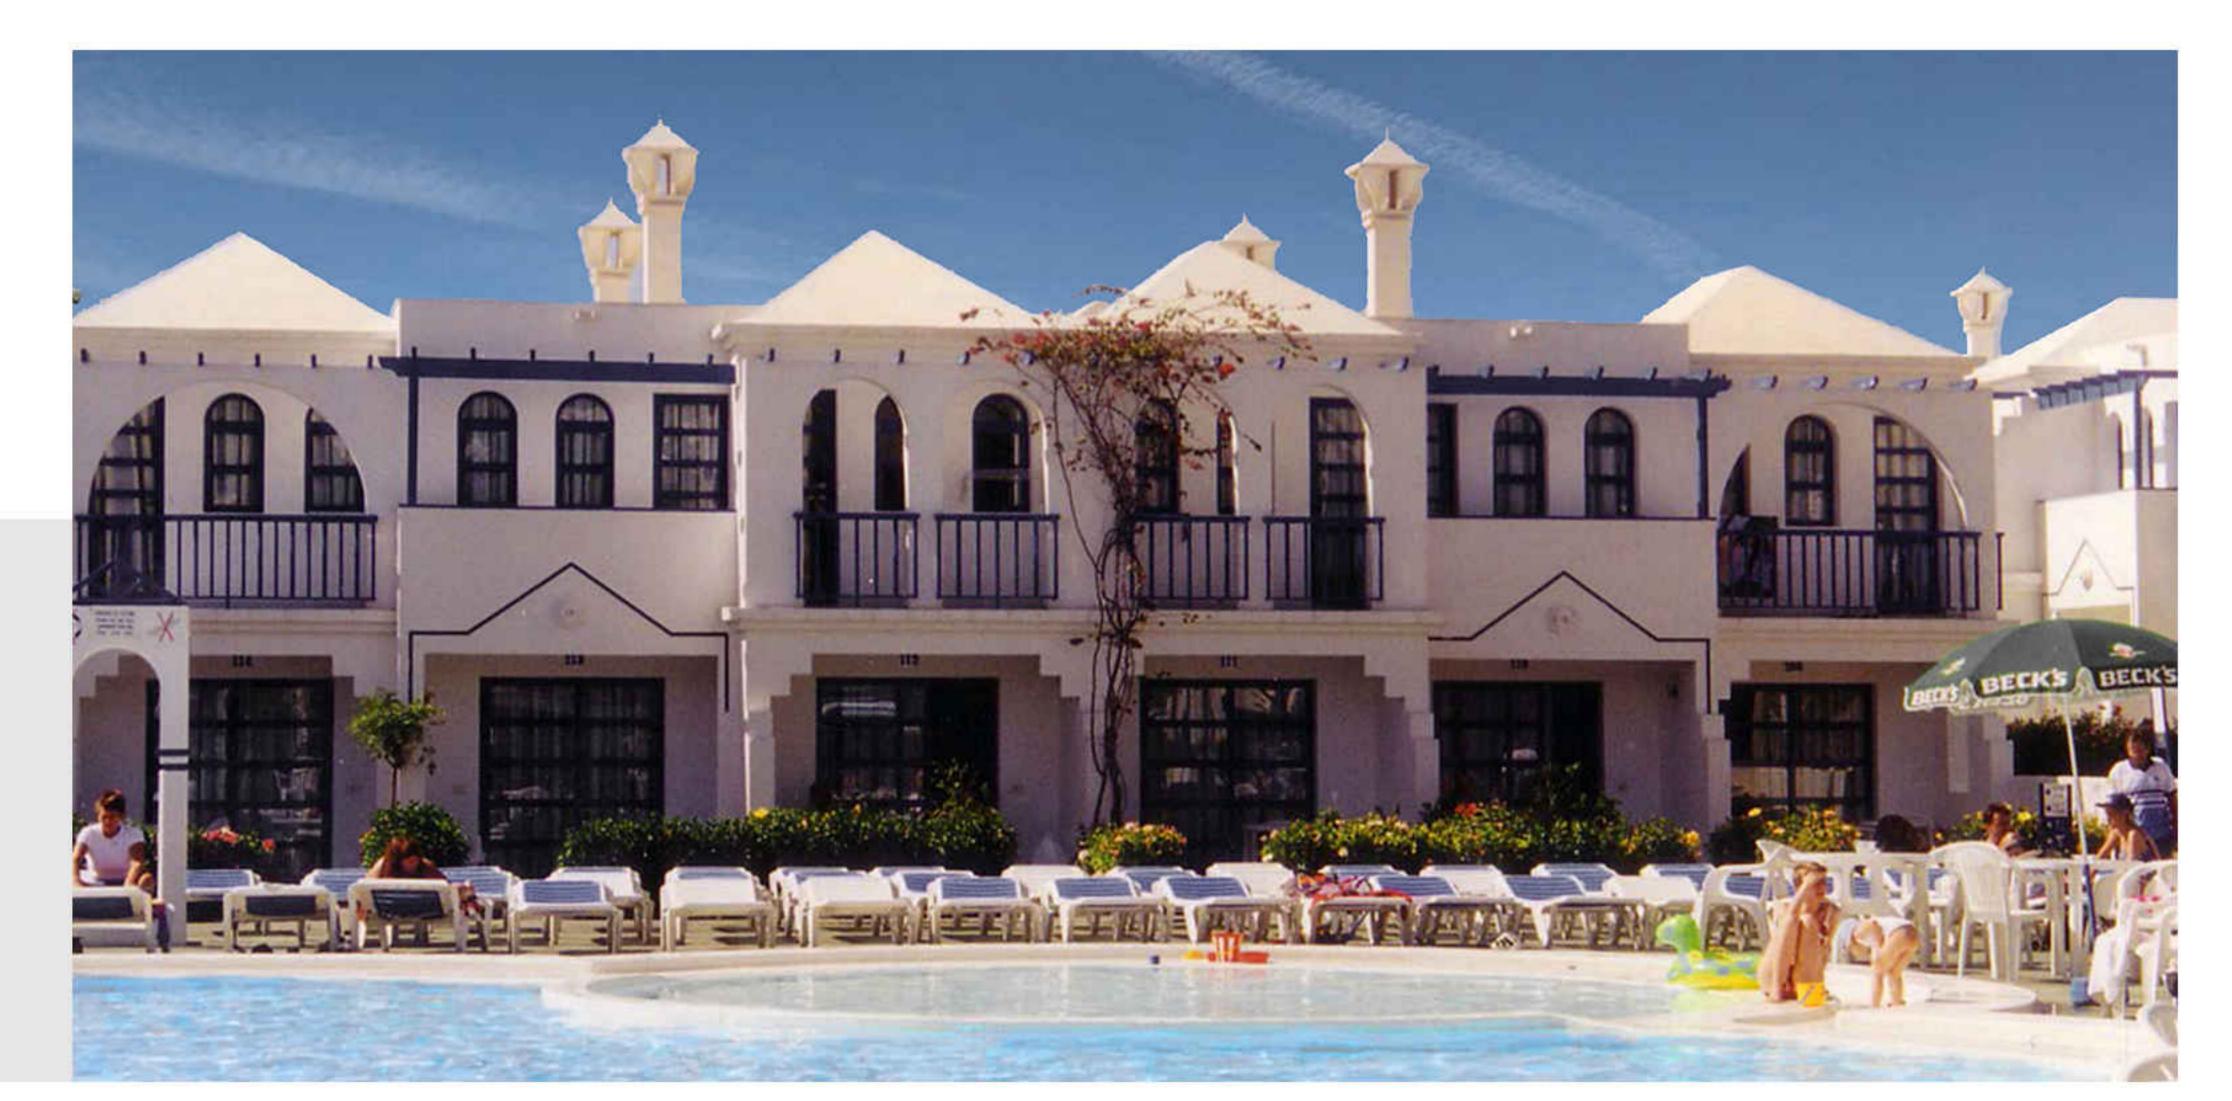






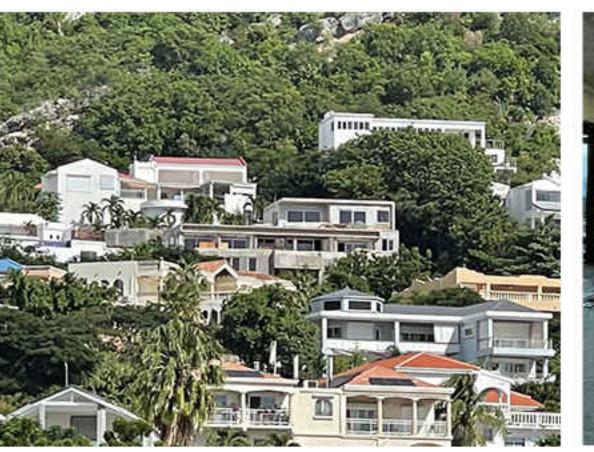



PRO

- Location: Italy

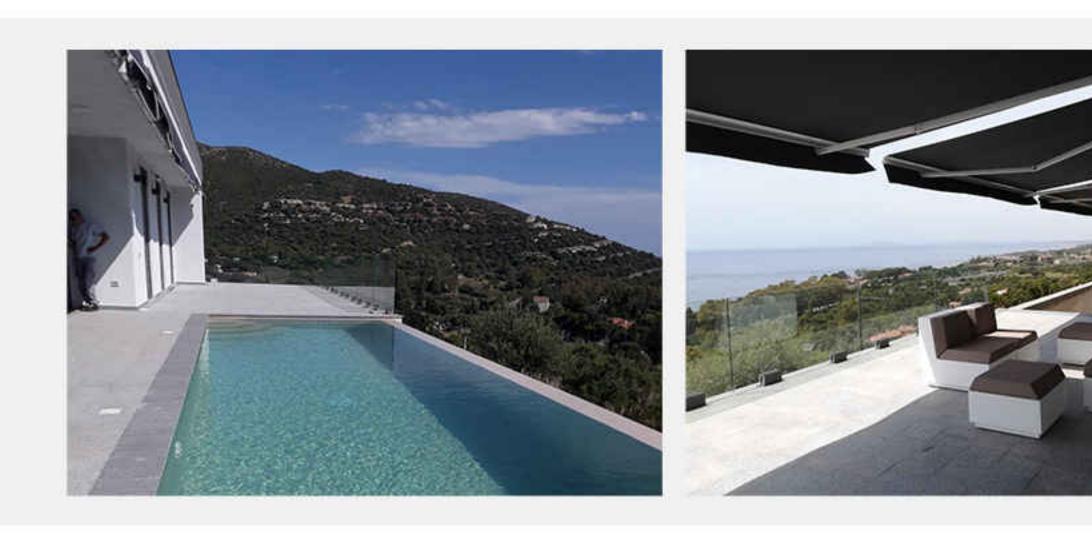





- Quantity: 7000 sqm

- Product: Window&Door

- Location: Uruguay

- Client: Contractor



SERVE CUSTOMERS WITH PROFESSIONALISM

COOPERATIVE SUPPLIERS

SELECTED EXELLENT SUPPLIERS FROM ALL OUVER THE WORLD AND SERVED CUSTOMERSWITH A STRONG TECHNICAL TEAM STABLE PRODUCT QUALITY AND RELIABLE SUPPLIER REPUTATIONINTEGRITY



















