

- 
- A modern office interior featuring large glass walls and doors. The space is bright and open, with a polished floor reflecting the light. In the background, a conference room with a long table and three chairs is visible. A potted plant sits on the floor near the glass wall. The overall design is sleek and professional.
- Swing door
 - Sliding door
 - Spring door

MATCHING DOOR



| -SWING DOOR



S12 FRAMELESS SWING GLASS DOOR

Construction options	Single glazing	Module width	standard up to 1050mm
Door thickness	12mm	weight	at least 25kg/m ²
Glass thickness	12mm	Sound insulation	STC=28DB
Height	standard up to 3100mm		

Key Management System



000

HANDLE OPTIONS




S45 SWING GLASS DOOR

Construction options	Single glazing	Module width	standard up to 1050mm
Door thickness	45mm	weight	at least 30kg/m ²
Glass thickness	10/12mm	Sound insulation	STC=35DB
Height	standard up to 3100mm		

Single layer 10mm or 12mm glass
classic style
relatively low cost
Fast delivery


○○○
SECTION VIEW

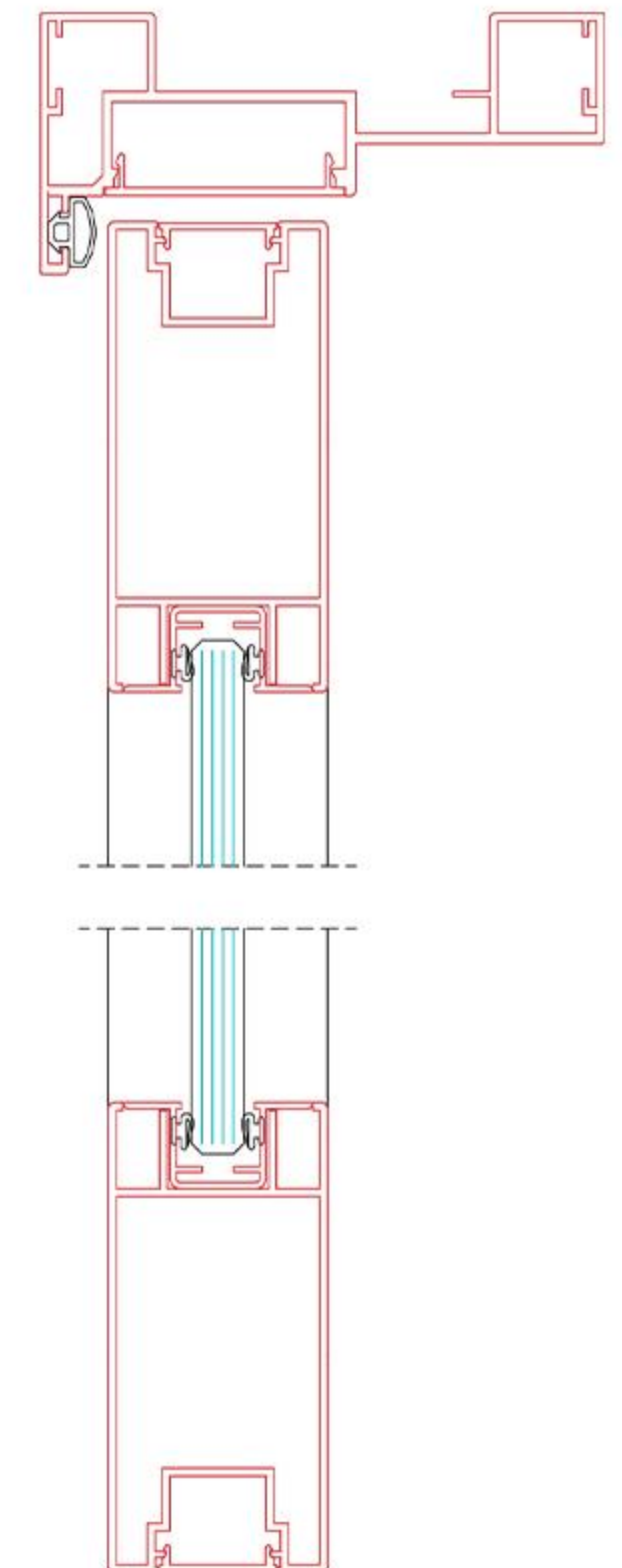




D45 SWING GLASS DOOR

Construction options	double glazing	Module width	standard up to 1050mm
Door thickness	45mm	weight	at least 30kg/m ²
Glass thickness	5mm+5mm	Sound insulation	STC=40DB
Height	standard up to 3100mm		

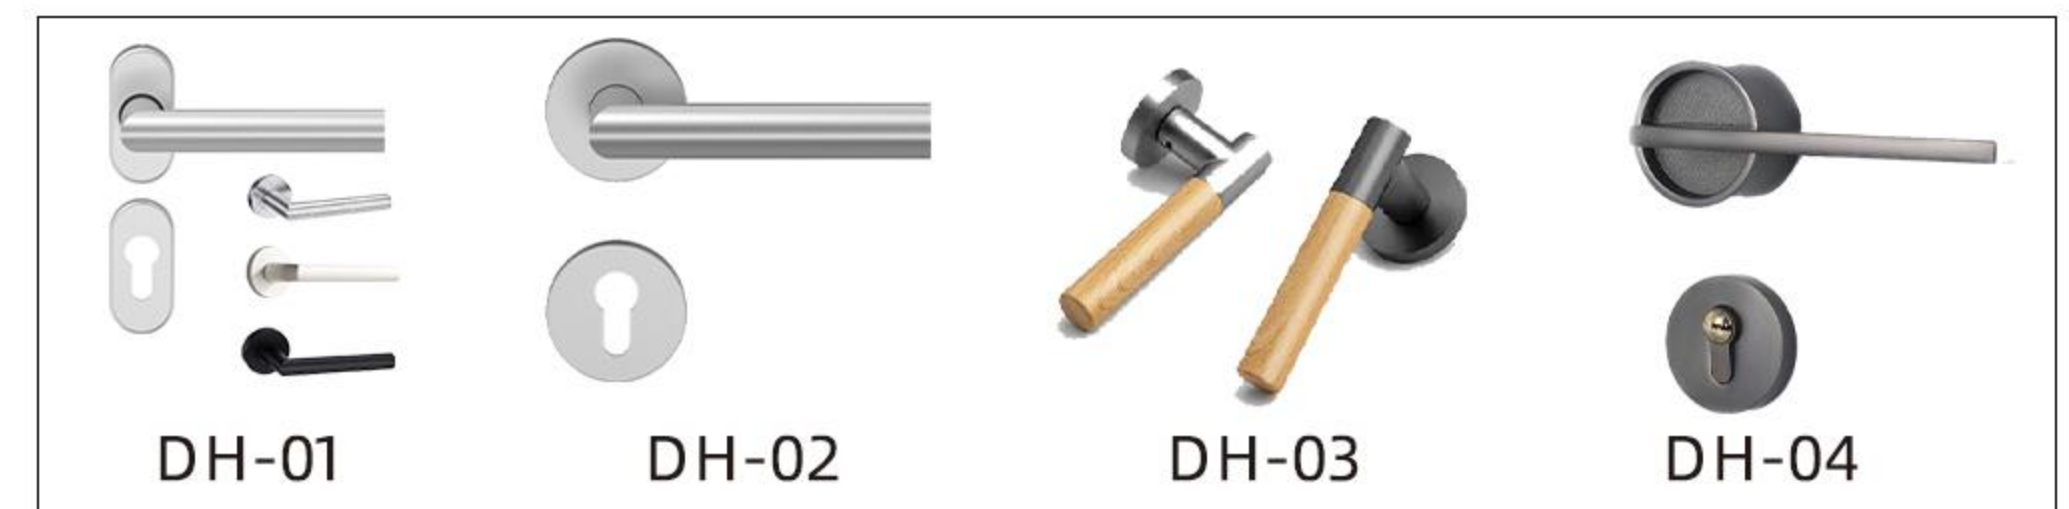

Material: 304 stainless steel
Handle color: stainless steel, black
Management System


HANDLE OPTIONS

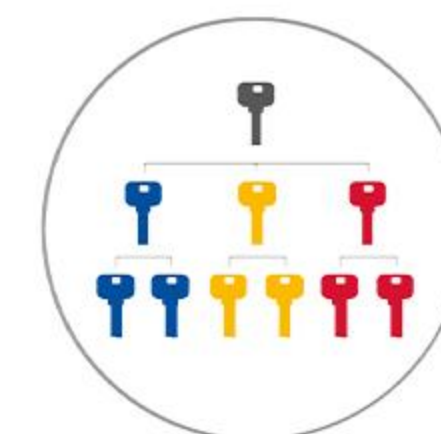



D60 SWING GLASS DOOR

Construction options	double glazing	Module width	standard up to 1050mm
Door thickness	60mm	weight	at least 30kg/m ²
Glass thickness	6mm+6mm	Sound insulation	STC=40DB
Height	standard up to 3100mm		

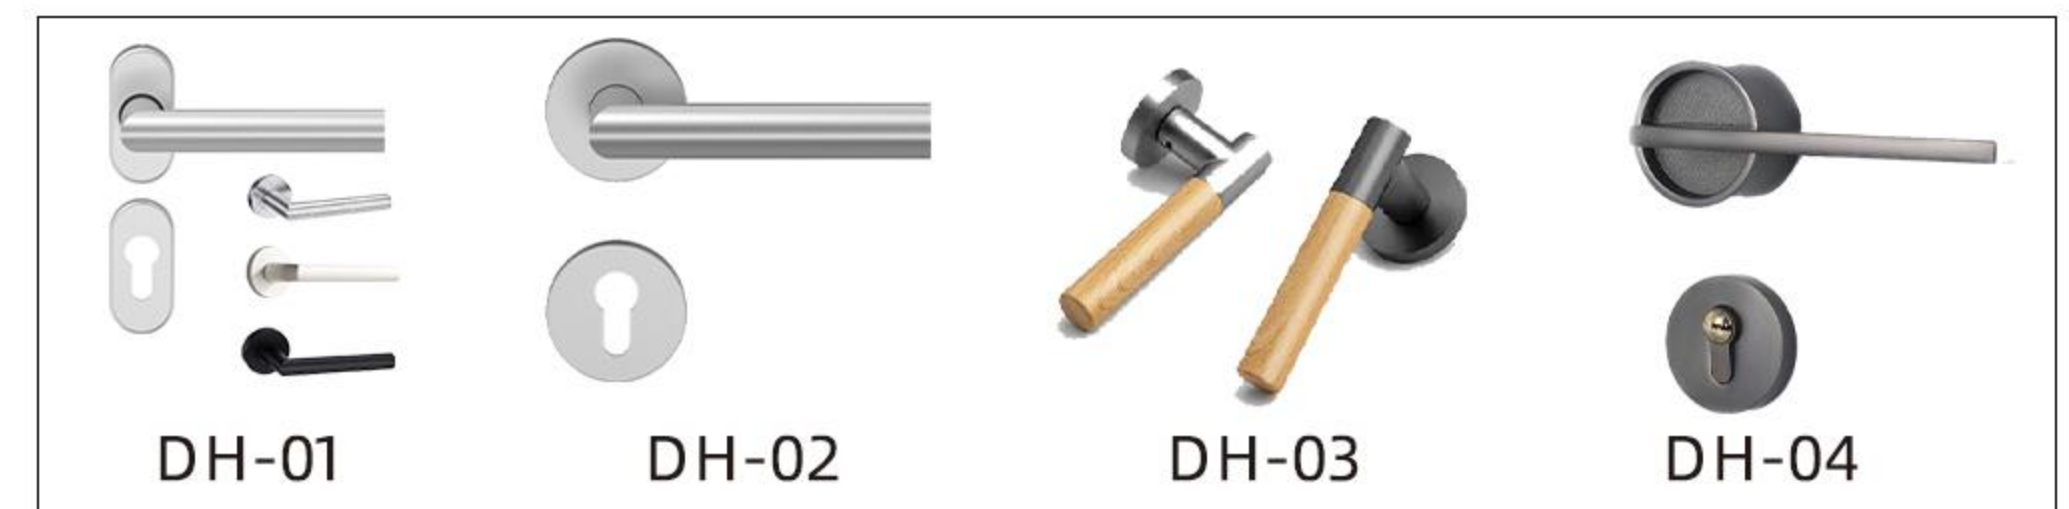

Material: 304 stainless steel
Handle color: stainless steel, black
Management System

000


HANDLE OPTIONS






D62 SWING GLASS DOOR

Construction options	double glazing	Module width	standard up to 1050mm
Door thickness	62mm	weight	at least 30kg/m ²
Glass thickness	8mm+6mm	Sound insulation	STC=45DB
Height	standard up to 3100mm		

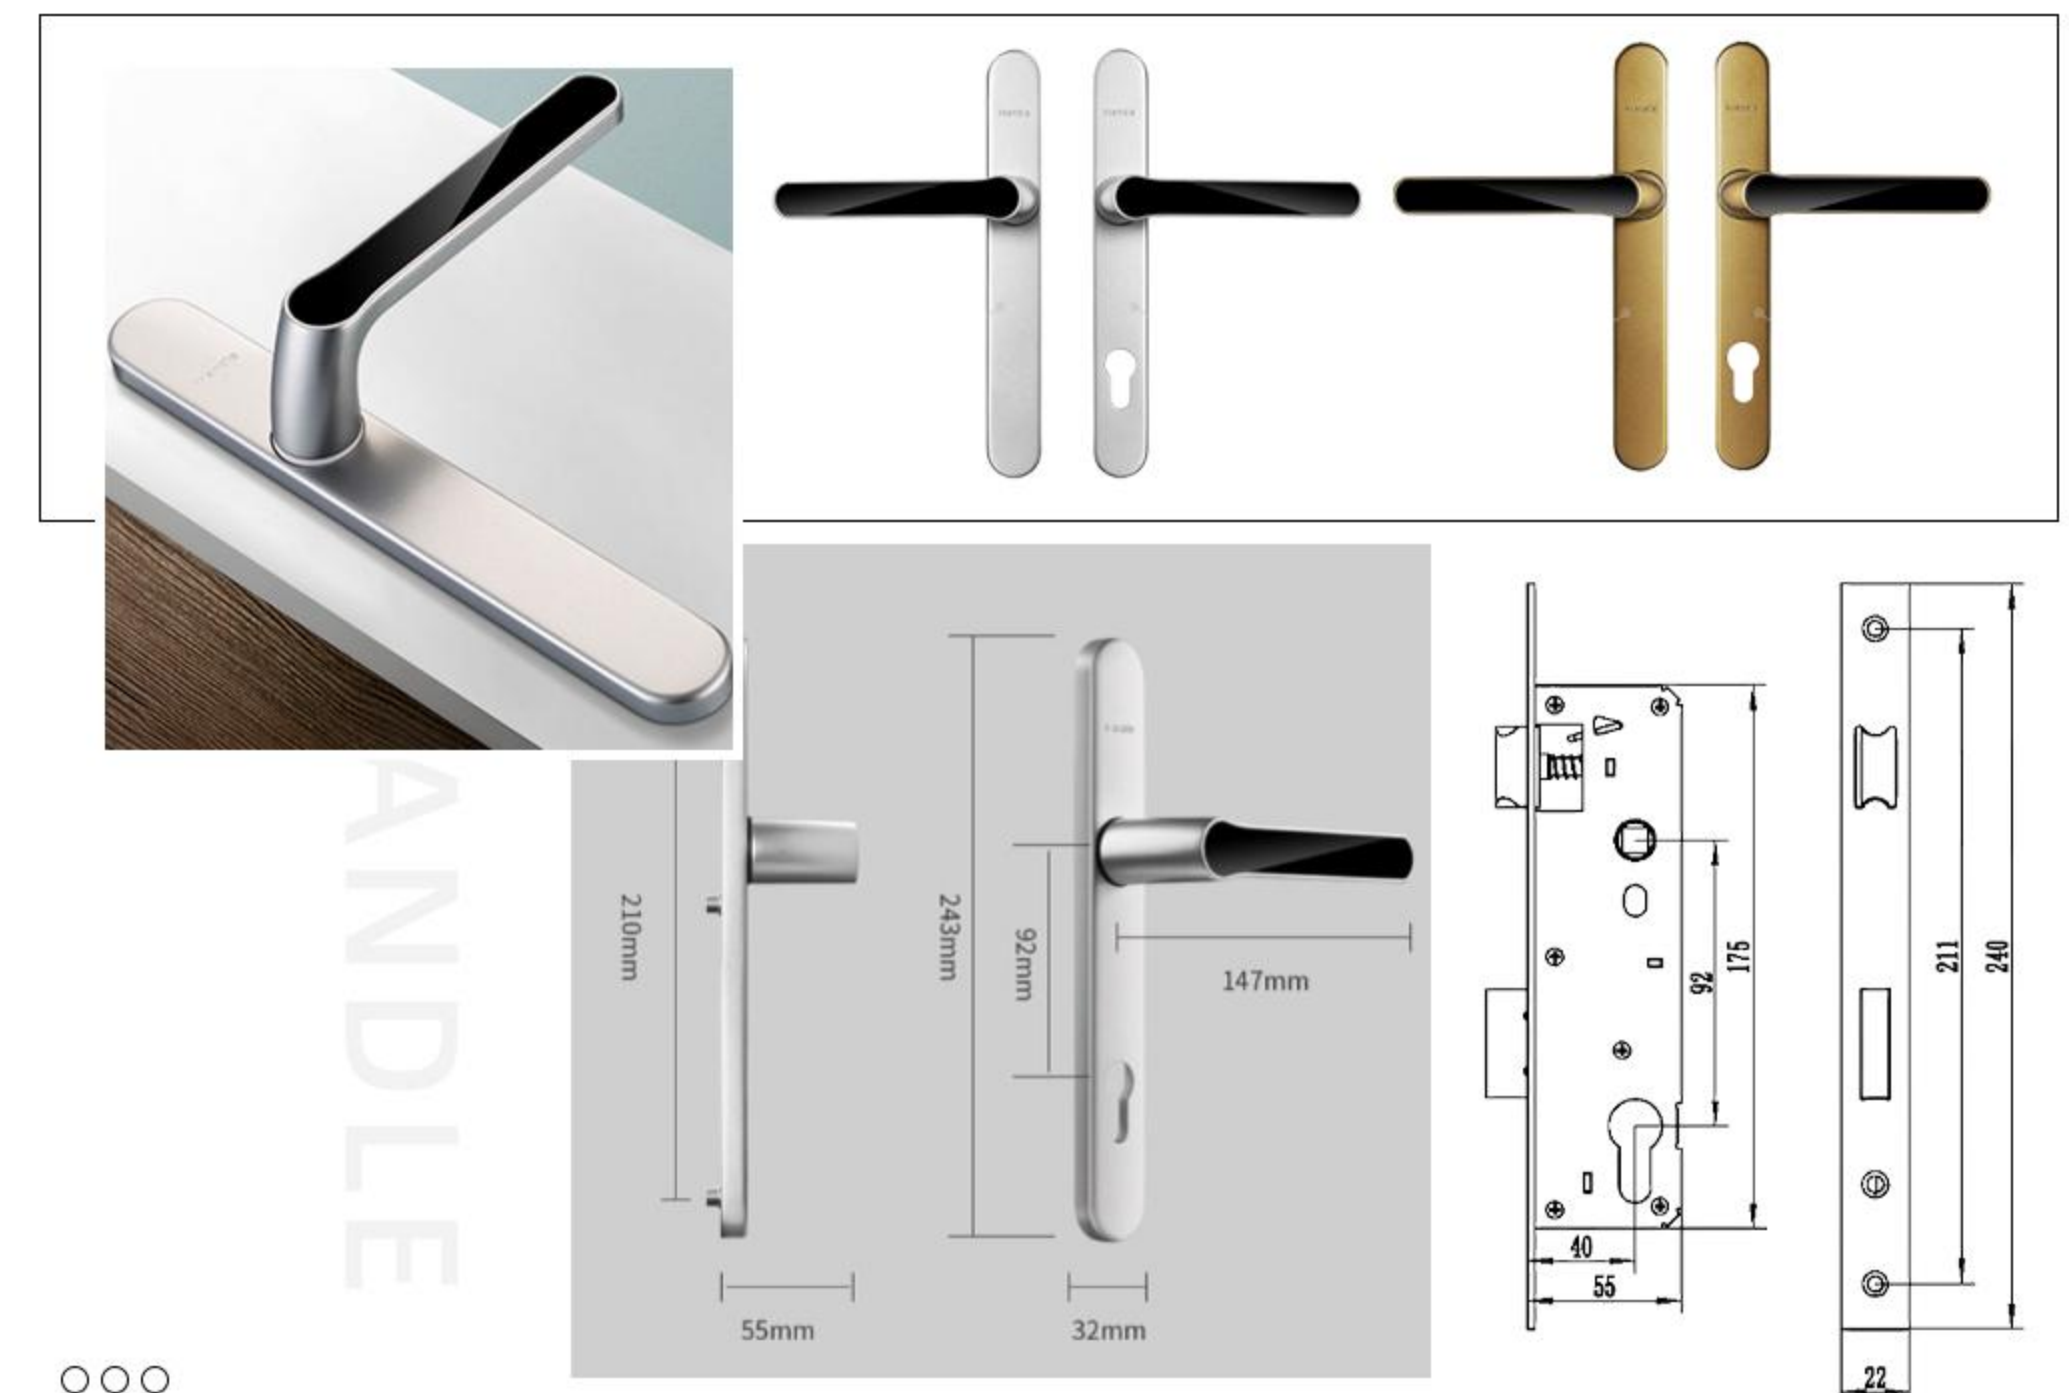

○○○ HANDLE OPTIONS

• OTHER OPTIONS-SMART DOOR LOCK

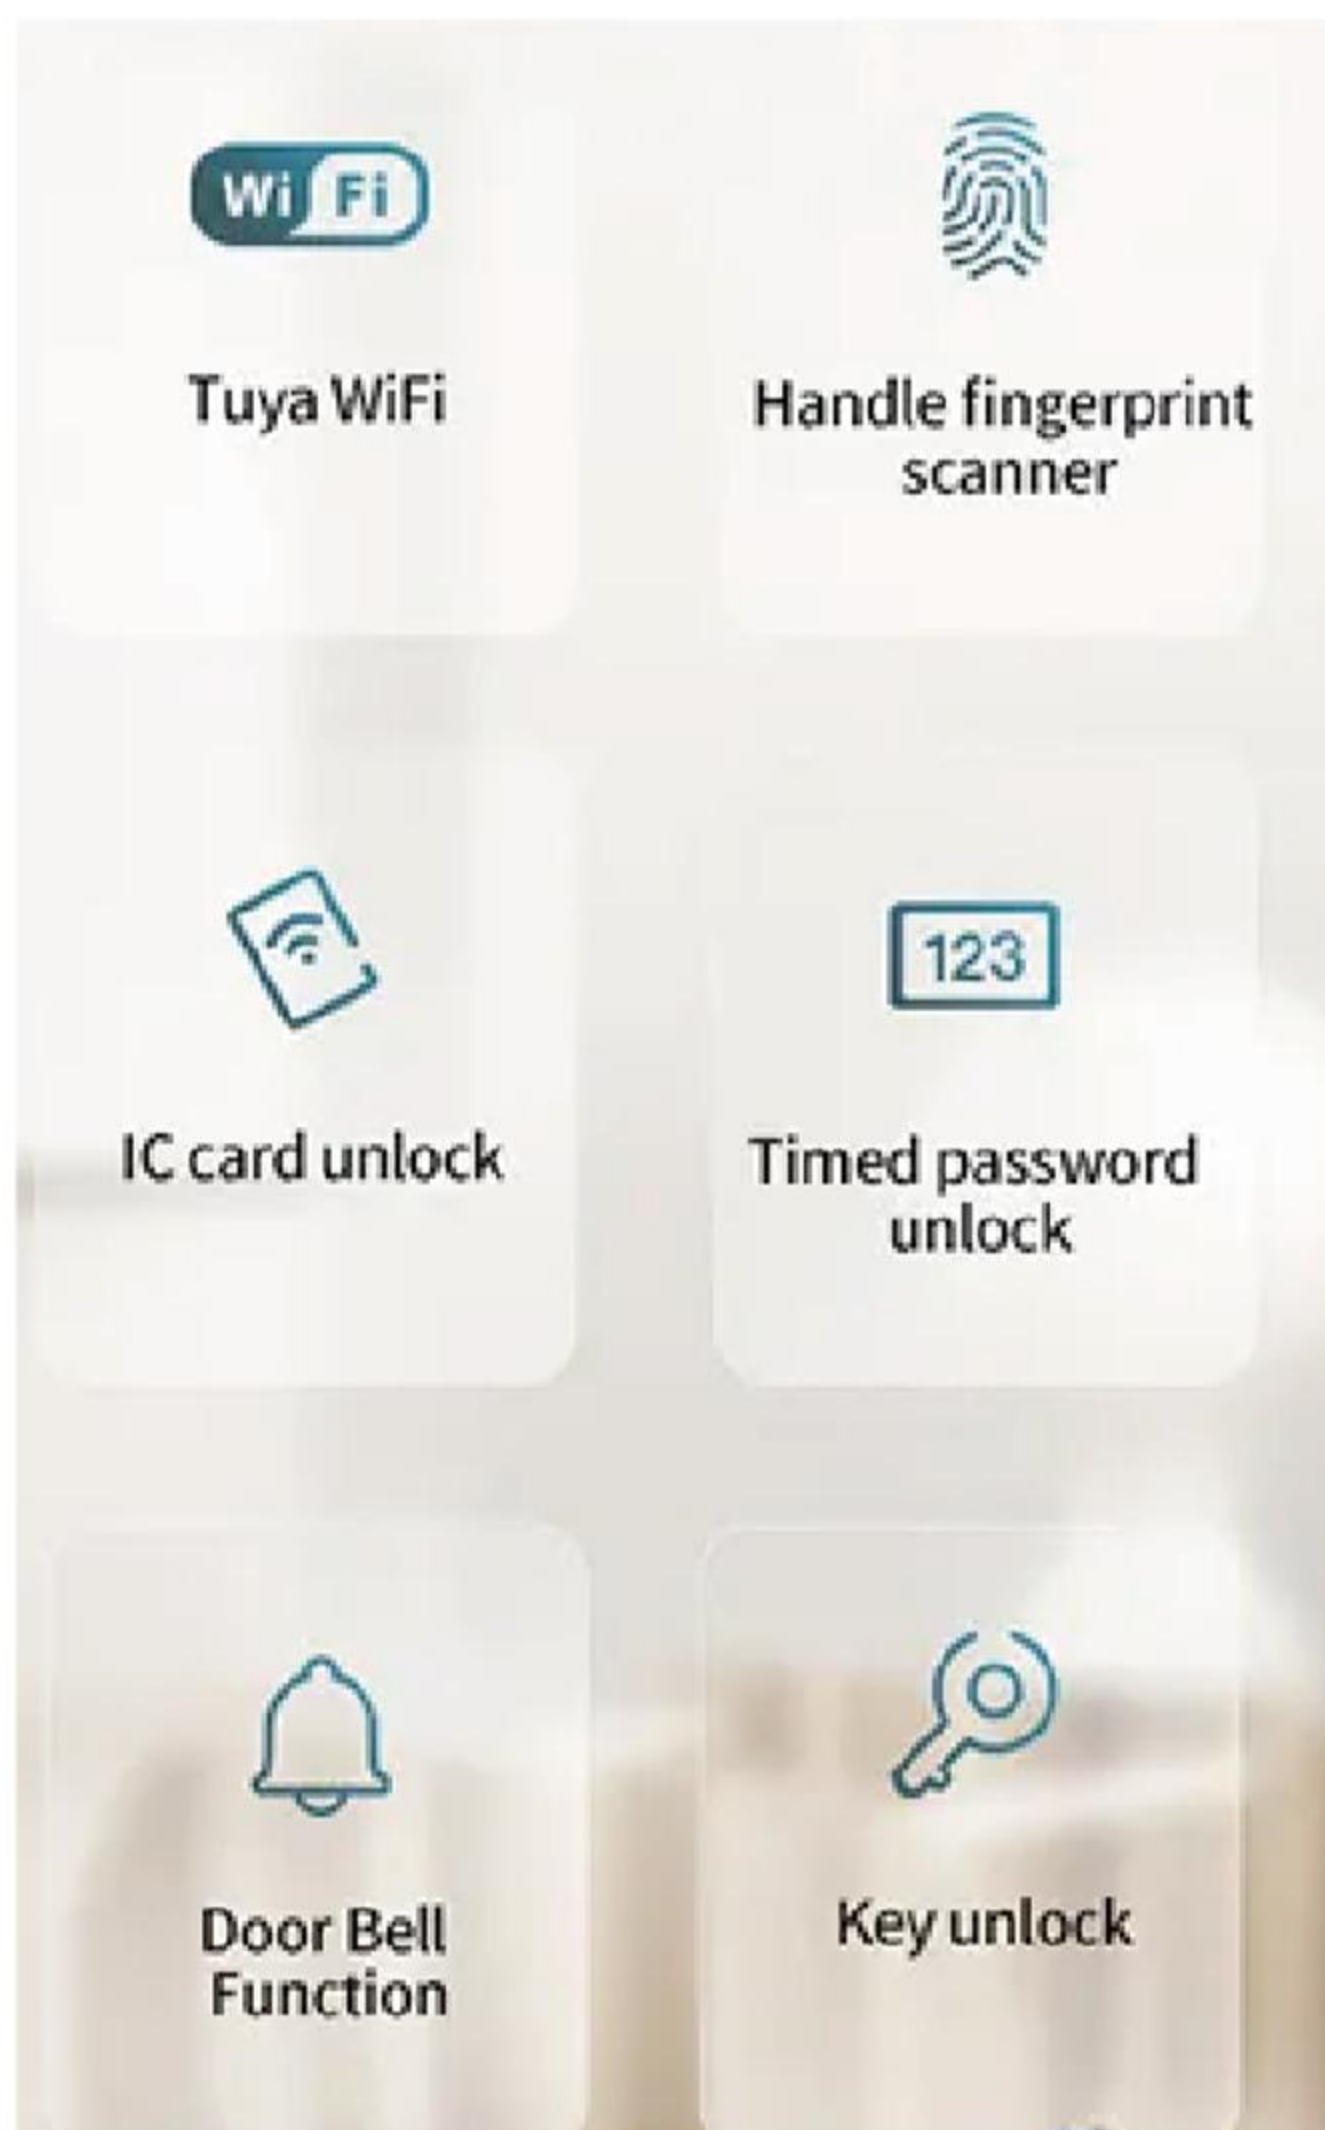

PH-01



PH-02

• DOOR LOCKS




DL-01



DL-02

G type lock body (heavy spring lock body)

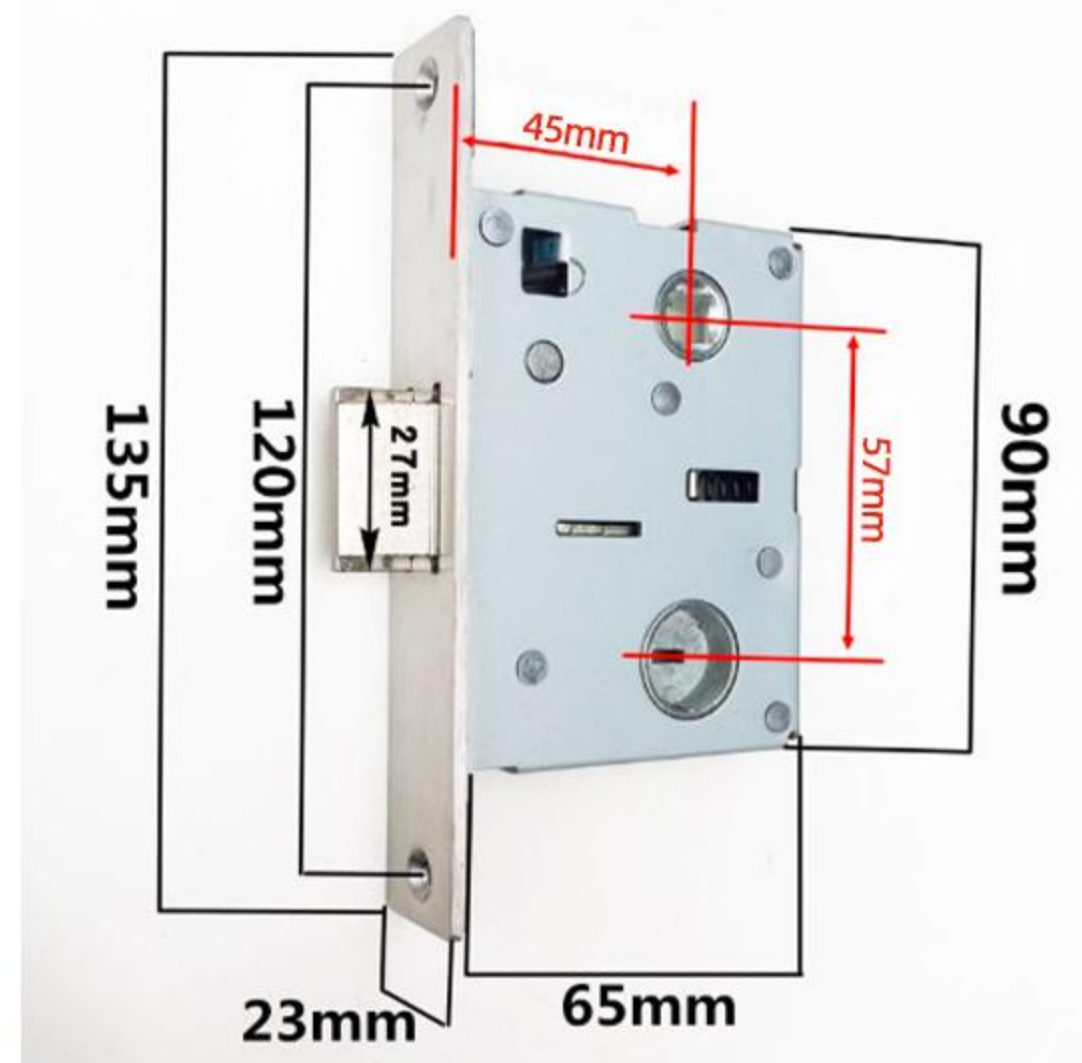


DL-03



DL-04



DL-05

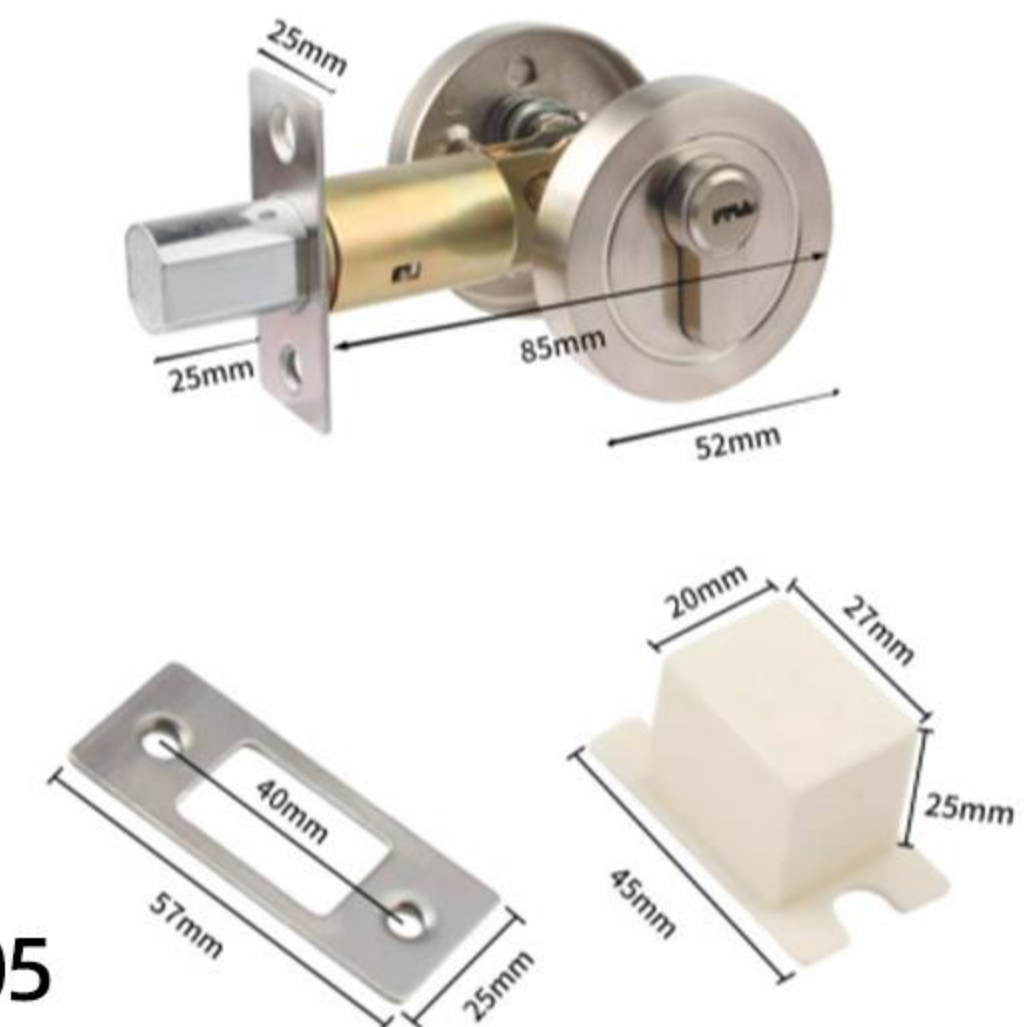



-SLIDING DOOR



S10 FRAMELESS SLIDING GLASS DOOR

Construction options	single glazing	Module width	standard up to 1050mm
Door thickness	10mm	weight	at least 25kg/m ²
Glass thickness	10mm	Sound insulation	STC=28DB
Height	standard up to 2800mm		



DETAILS



S50 SLIDING GLASS DOOR

Construction options	single glazing	Module width	standard up to 1050mm
Door thickness	50mm	weight	at least 30kg/m²
Glass thickness	8mm/10mm	Sound insulation	STC=30DB
Height	standard up to 3200mm		



DETAILS

○○○
DETAILS





D50 SLIDING GLASS DOOR



Construction options	double glazing	Module width	standard up to 1050mm
Door thickness	50mm	weight	at least 30kg/m²
Glass thickness	5mm+5mm	Sound insulation	STC=35DB
Height	standard up to 3000mm		



DETAILS



000
DETAILS

• SLIDING DOOR PULLEY SYSTEM

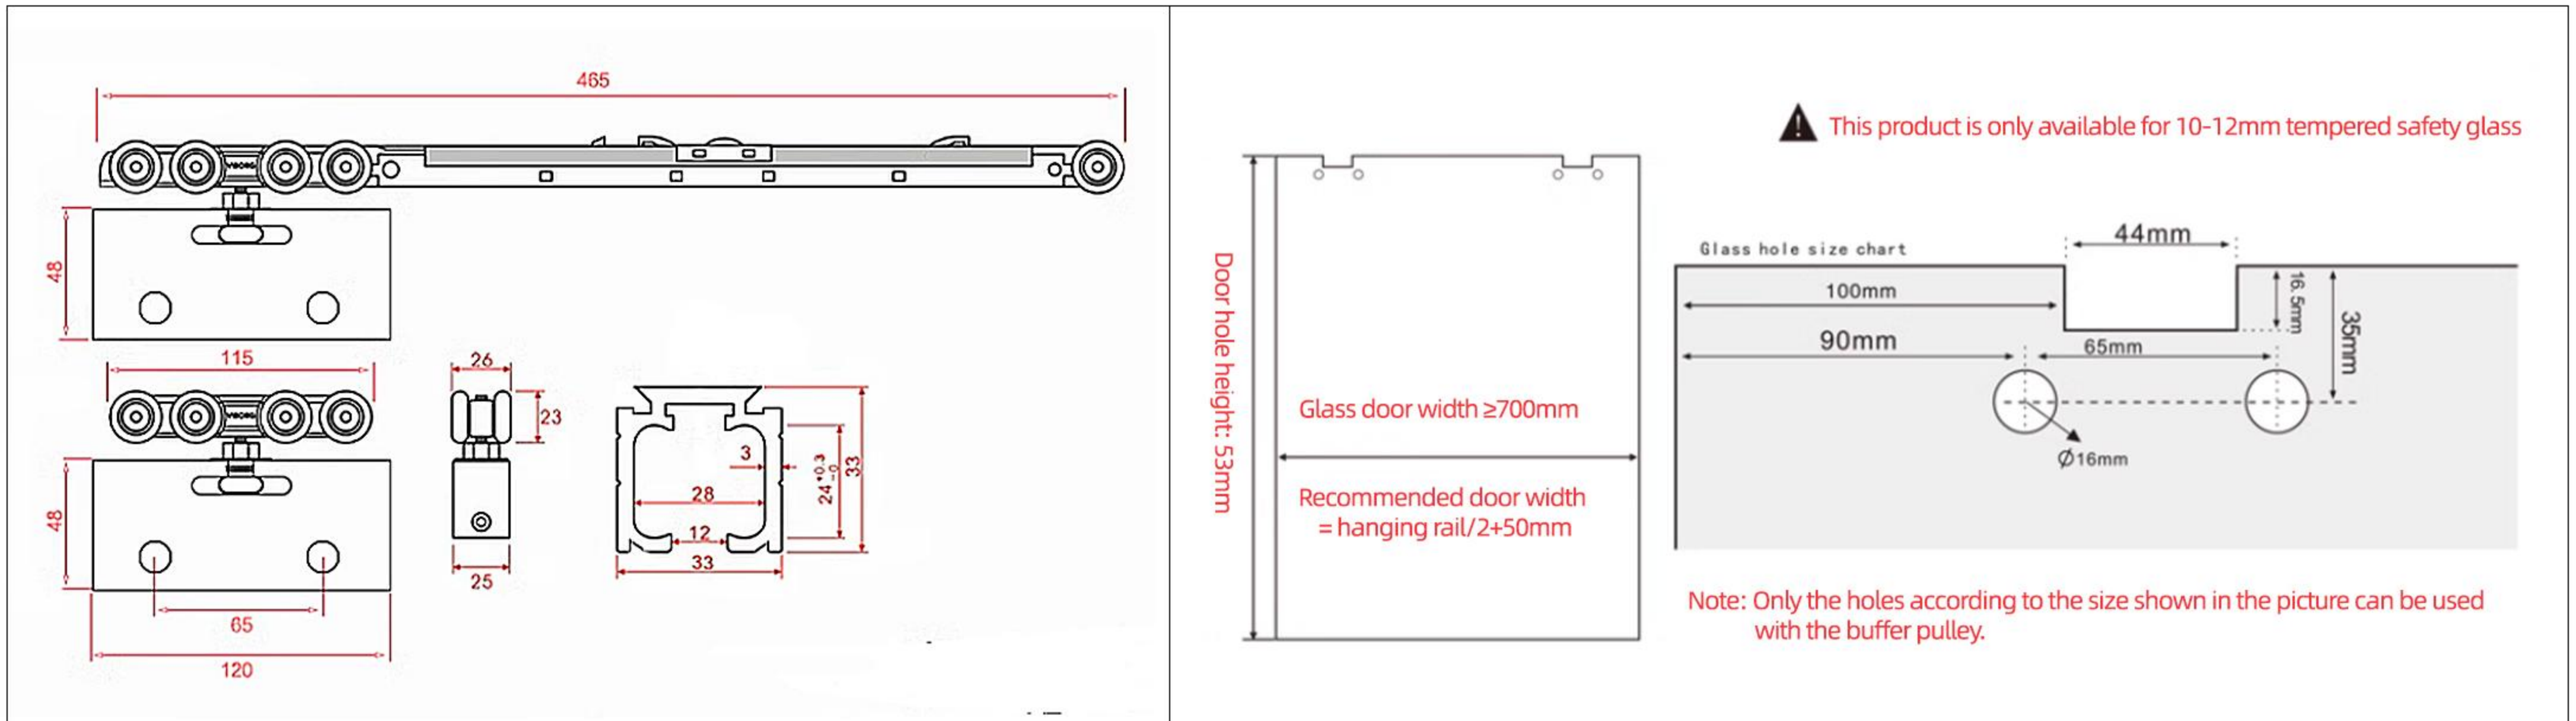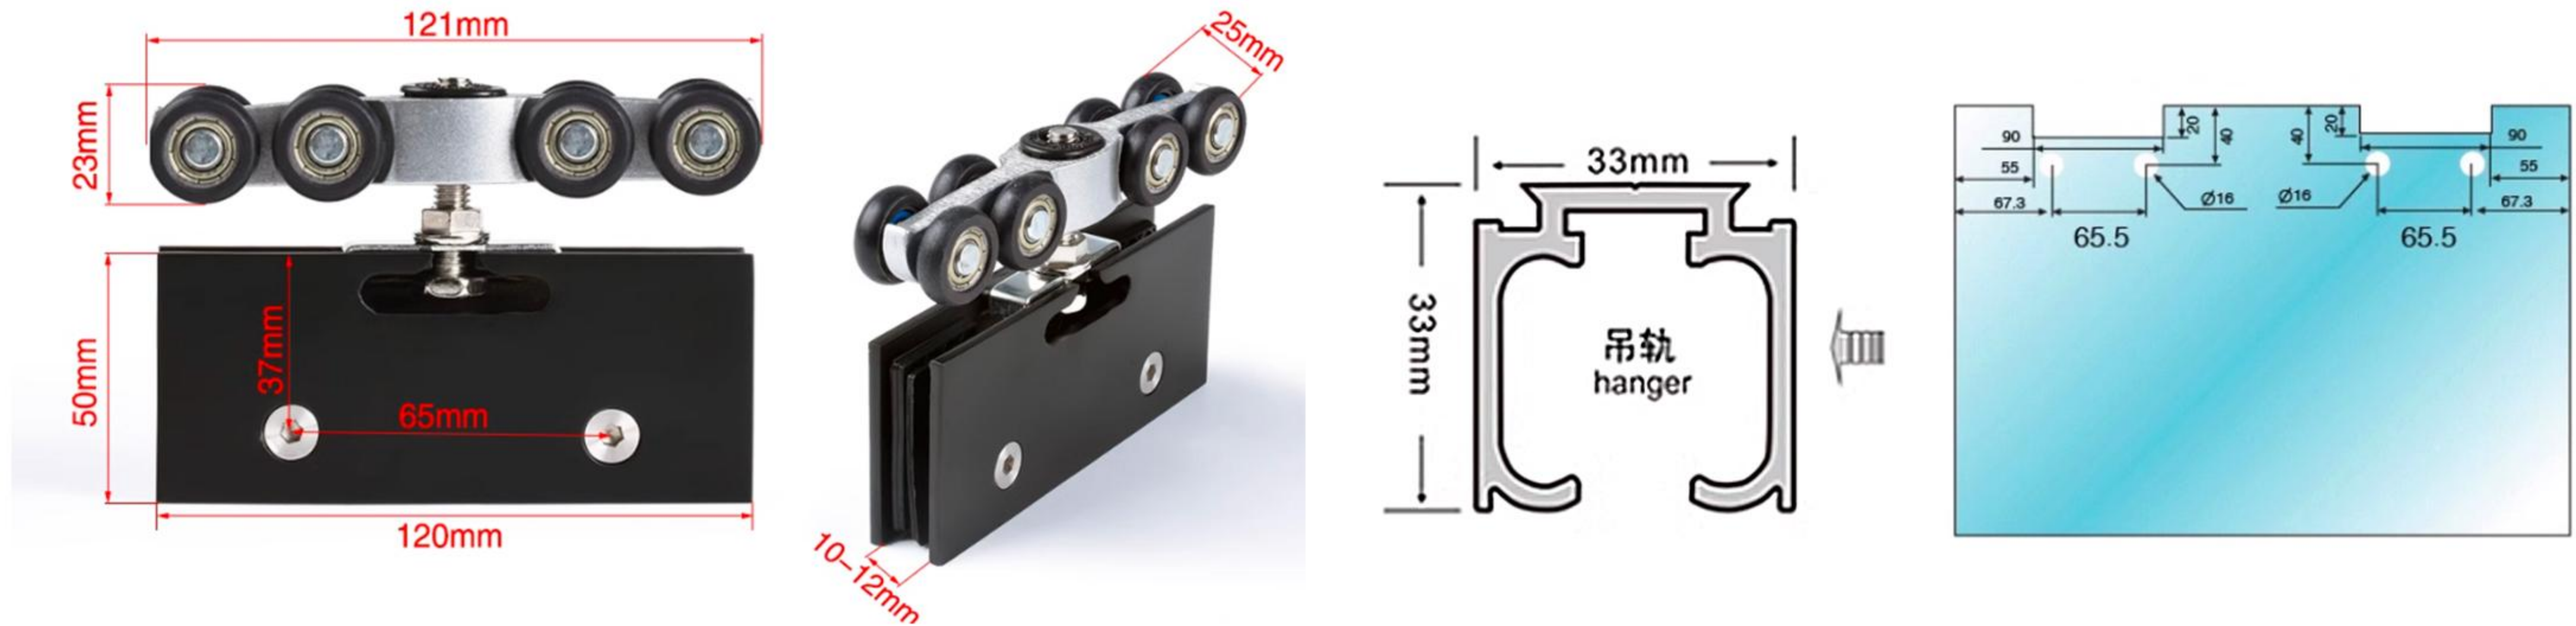

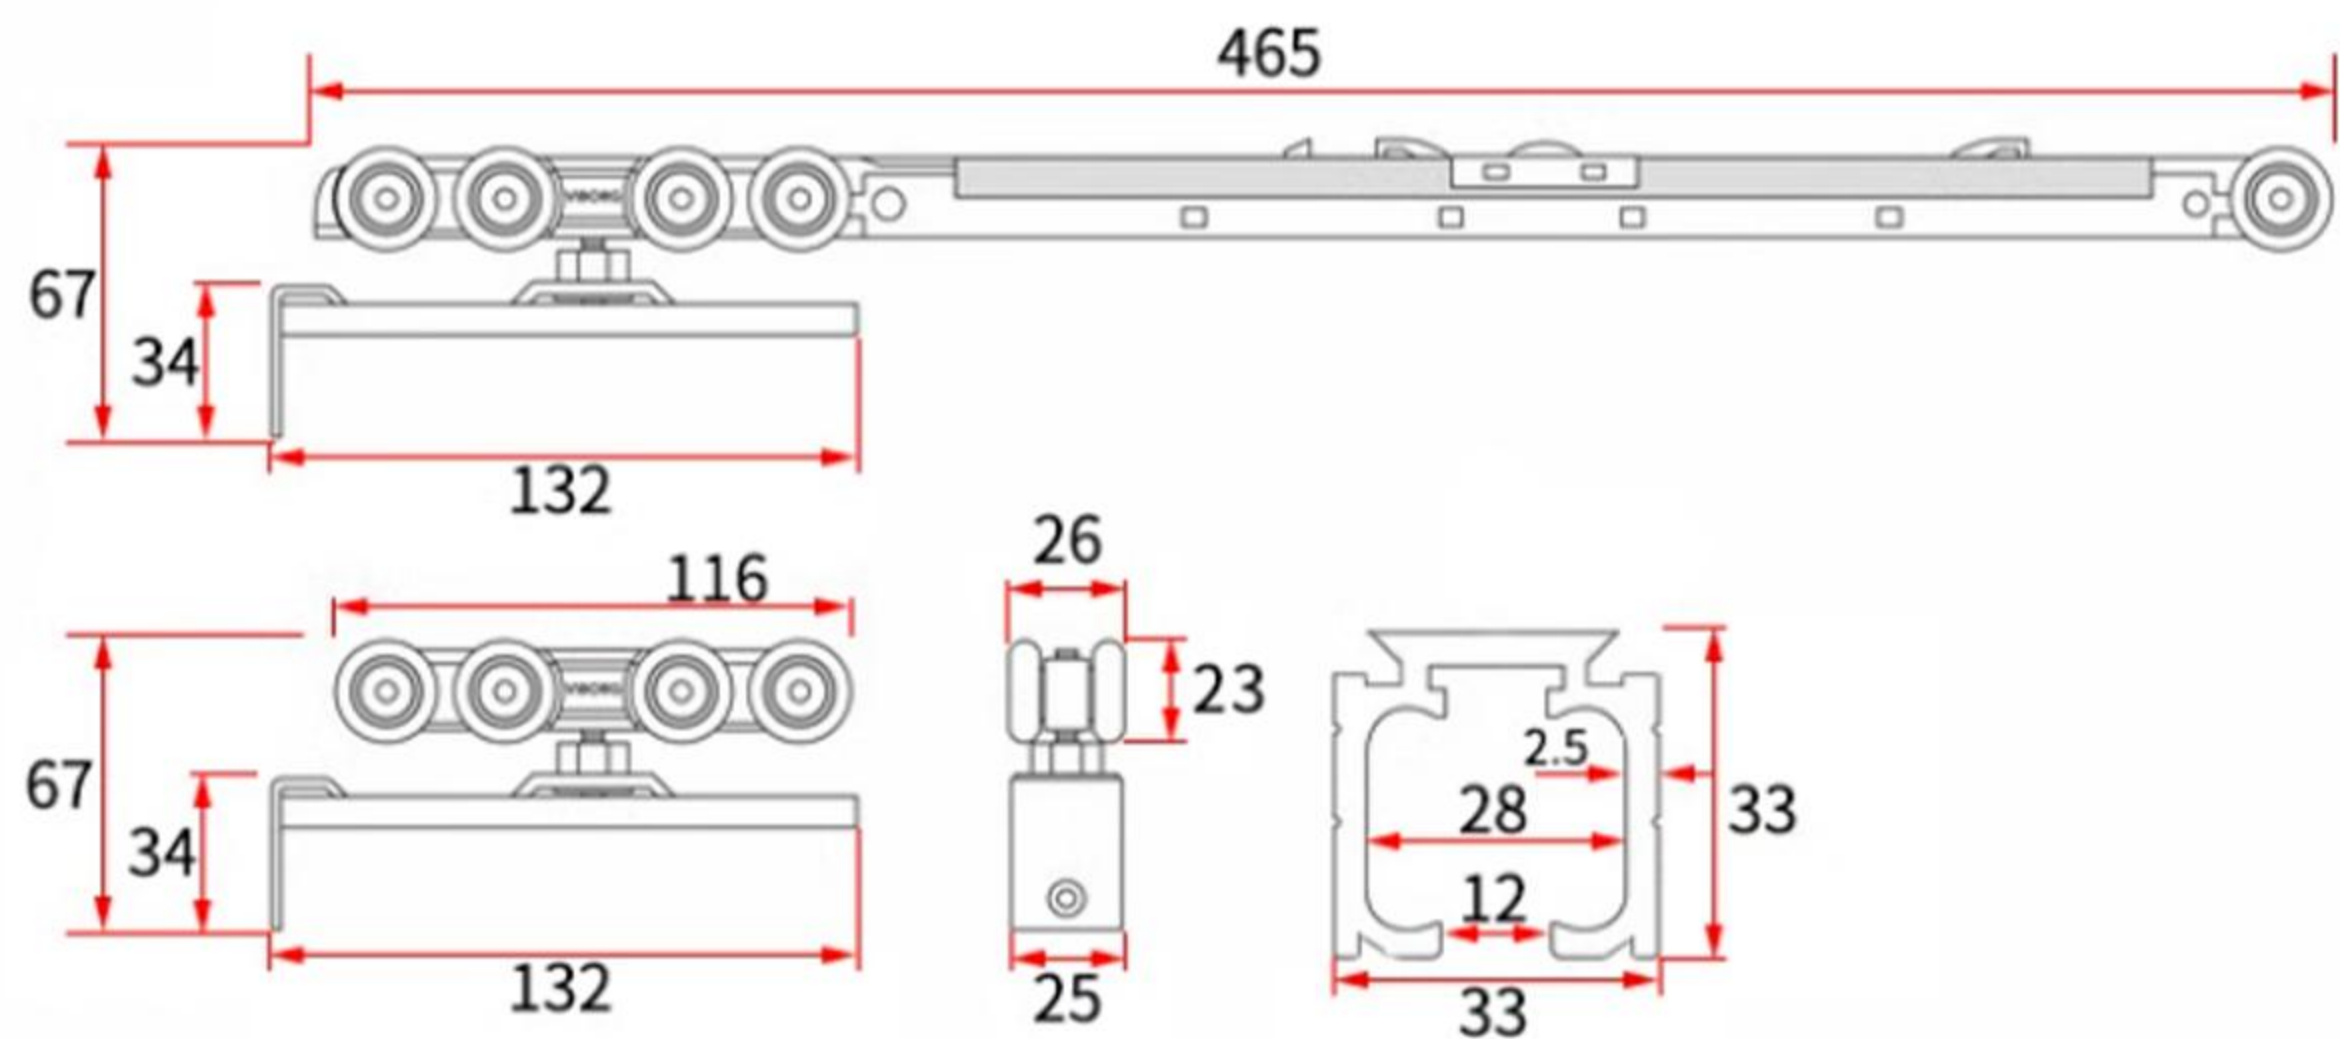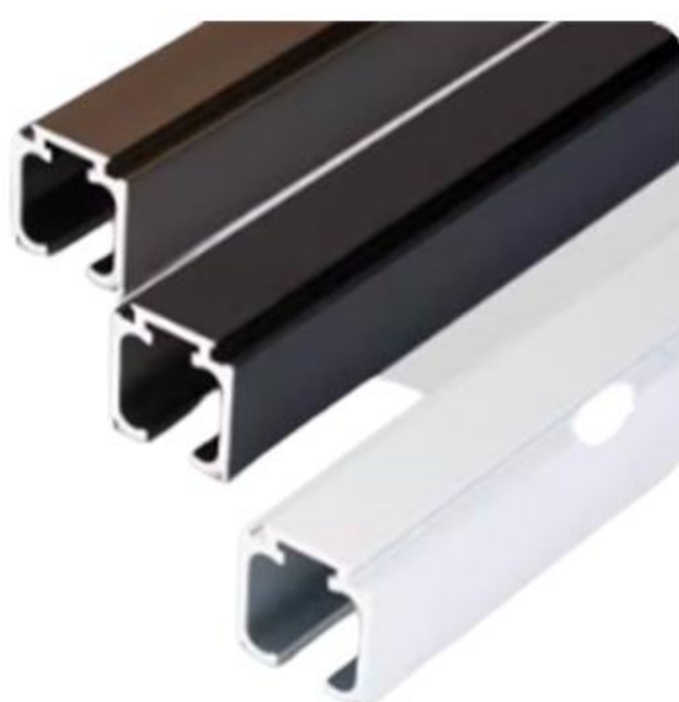



| -SPRING DOOR




S12 FRAMELESS SPRING GLASS DOOR

Construction options	single glazing	Module width	standard up to 1050mm
Door thickness	12mm	weight	at least 30kg/m²
Glass thickness	12mm	Sound insulation	STC=25DB
Height	standard up to 2800mm		

DETAILS

000
DETAILS





S45 SPRING GLASS DOOR

Construction options	double glazing	Module width	standard up to 1050mm
Door thickness	62mm	weight	at least 30kg/m ²
Glass thickness	8mm+6mm	Sound insulation	STC=42DB
Height	standard up to 3000mm		

DETAILS

000
DETAILS

